


DATE:	3/15/2019	3C20HDPE-DWAM-PUR			REVISION:	C
-------	-----------	-------------------	--	--	-----------	---

DESCRIPTION:	THREE CONDUCTOR 20 AWG, SHIELDED, PUR JKT
CONDUCTOR:	#20 7/0121 TINNED COPPER
INSULATION:	.010" HDPE
CONSTRUCTION:	THREE (3) CONDUCTORS CABLED TOGETHER
DRAIN WIRE:	#22 7/30 TINNED COPPER
TAPE SHIELD:	ALUMINUM/POLYESTER TAPE SHIELD, FOIL FACING IN, 100% COVERAGE
JACKET:	PRESSURED BLACK POLYURETHANE (GTX94-350B)
OD:	.200"
JACKET PRINT	
IN SILVER INK:	FluxForce™ 3C20 SHIELDED....E83208 RU AWM 20668 90C 300V....-40C TO +90C...cRU AWM I/II A/B FT-1...ROHS...CE
COLOR CODE	1) BLACK 2) GREEN 3) RED
<p>Mutual Capacitance: 16 pF/ft Inductance 0.17 µH/ft, Nominal</p>	

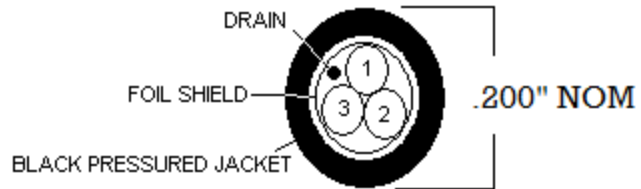

 <h1>CABLE TECHNOLOGY, INC.</h1> <p>73 RIVER ROAD - WILLINGTON, CT 06279 - (860) 429 - 7889 FAX (860) 429 - 3615</p>	PART NO:	CT-E393F		
	REVISION:	C		
	B: 6/11/2019 ADDED SILVER INK C: 3/4/2020 CHANGED COLOR ROTATION		<h2>ROHS COMPLIANT</h2>	