





150 UL 3266 / 3398

UL 3266 / 3398, CSA, 125°C / 150°C , 300V

- Irradiation Crosslinked
- Won't Melt, Creep or Flow
- Cuts and Strips Consistently on the Latest High-speed Equipment
- Excellent Oil and Chemical Resistance
- Mechanically Tough
- Very Cost Effective Hook-up Wire

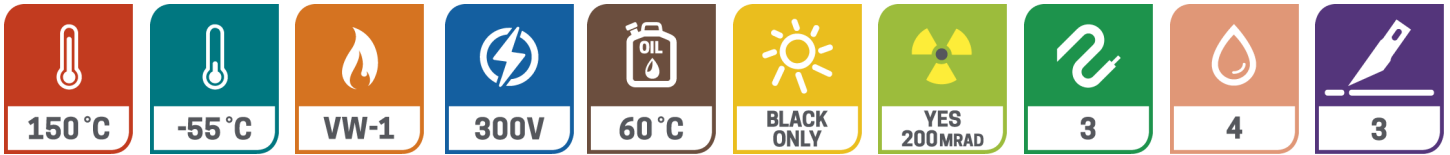

Product Number	Conductor Tin Copper	Nom. Conductor Diameter		Nom. Insulation Thickness		Nom. Finished Diameter		Finished Weight (lbs/mft)	Ampacity 40°C, Free Air
		in.	mm.	in.	mm.	in.	mm.		
3266-26/XX-A0	26 (1/26)	.015	.38	.016	.41	.050	1.27	1.73	3
3266-26/XX-B0	26 (7/34)	.019	.48	.016	.41	.051	1.30	1.91	3
3266-26/XX-E0	26 (19/38)	.020	.51	.016	.41	.053	1.35	1.98	3
3266-24/XX-A0	24 (1/24)	.020	.51	.016	.41	.054	1.37	2.29	7
3266-24/XX-B0	24 (7/32)	.024	.61	.016	.41	.056	1.42	2.56	7
3266-24/XX-E0	24 (19/36)	.024	.61	.016	.41	.057	1.45	2.61	7
3266-22/XX-A0	22 (1/22)	.025	.64	.016	.41	.059	1.50	3.16	14
3266-22/XX-B0	22 (7/30)	.030	.76	.016	.41	.062	1.58	3.54	14
3266-22/XX-E0	22 (19/34)	.031	.79	.016	.41	.063	1.60	3.65	14
3266-20/XX-A0	20 (1/20)	.032	.81	.016	.41	.066	1.68	4.52	18
3266-20/XX-B0	20 (7/28)	.038	.97	.016	.41	.070	1.78	5.05	18
3266-20/XX-E0	20 (19/32)	.038	.97	.016	.41	.071	1.80	5.27	18
3266-18/XX-A0	18 (1/18)	.040	1.02	.016	.41	.074	1.88	6.51	24
3266-18/XX-B0	18 (7/.0152)	.045	1.14	.016	.41	.077	1.96	6.74	24
3266-18/XX-E0	18(19/.0092)	.045	1.14	.016	.41	.077	1.96	6.67	24
3266-16/XX-F0	16 (26/30)	.058	1.47	.016	.41	.092	2.34	10.15	31
3266-14/XX-H0	14 (41/30)	.071	1.85	.016	.41	.107	2.72	15.34	46
3266-12/XX-J0	12 (65/30)	.089	2.26	.016	.41	.121	3.07	23.40	60
3266-10/XX-J0	10 (65/28)	.111	2.81	.017	.43	.145	3.68	36.12	80

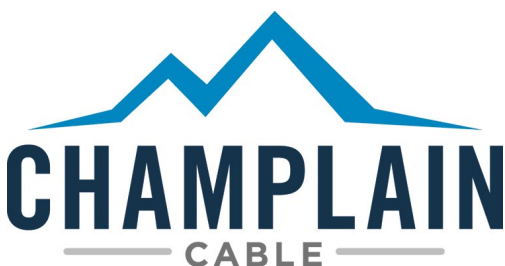



150

UL 3266 / 3398

PROPERTIES	EXAR® 150	
Approvals / Listings:		
UL	UL 3266 / 3398	
CSA	AWM	
Physical:		
Temperature Rating	150°C	
Voltage Rating (Vrms)	300V	
Flexibility: 7 days @ 136 °C	Pass	
Cold Bend: 4h @ -70°C	Pass	
Tensile Strength:		
Unaged	2000psi	
Retention after 7 days @ 150° C	2010psi	
Elongation:		
Unaged	250%	
Retention after 7 days @ 150°C	235%	
Flame Test:		
UL VW-1	Pass	
Chemical Resistance		
Acetone	Swell @ 23°C**	5-10%
Acid - H2SO4 S.G. 1.260 5%	Swell @ 23°C**	1.0%
Engine Oil - ASTM D-471 IRM-902	Swell @ 110°C**	1.8%
Benzene	Swell @ 23°C/24h	Not recommended
Epoxy	Swell @ 23°C/24h	<5%
Gasoline - ASTM D-471 Fuel C	Swell @ 23°C**	<1%
Methanol	Swell @ 23°C/24h	<1%
Toluene	Swell @ 23°C/24h	Not recommended
Xylene	Swell @ 23°C/24h	Not recommended
Electrical:		
Dielectric Constant 150/100MHz		3.1
Dielectric breakdown strength (Vrms)		12,000 volts
Oxygen Index: (D2868 Standard)		25

We cannot anticipate all conditions under which this information and our products or the products of other manufacturers in combination with our products may be used. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each such product combination for their own purpose. Unless otherwise agreed in writing, we sell the products without warranty, and buyers and users assume all responsibility and liability for loss and damage arising from the handling and use of our products whether used alone or in combination with other products

Manufacturing Locations:

Colchester, Vermont

El Paso, Texas

www.champcable.com

