


REV.	DESCRIPTION	DATE
0	Initial release.	3/25/2016

**General Properties** 25.0mm<sup>2</sup> 798/.20mm Bare Copper HVFX Thick Wall High Voltage Cable

**Application** Hybrid or Electric powered Vehicles

**General Composition of Cable** See Below

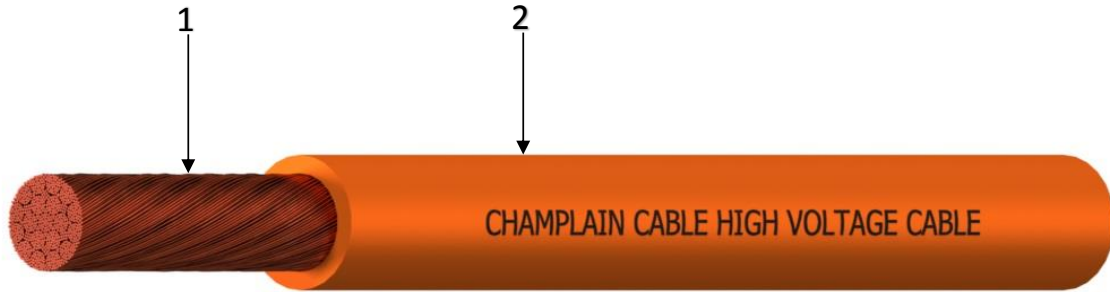

**Color Code**  
Inner ORG

**Physical Data**

Description	Dimensions (Nom.)	
	inches	mm
1. Conductor:	25.0mm <sup>2</sup> 798/.20mm Bare Copper	0.275 6.99
2. Insulation:	EXRAD HVFX wall thickness: 55 mil OD Tolerance	0.385 9.78 +/- 0.012" +/- 0.3mm
Print Legend:	CHAMPLAIN CABLE 25.0mm <sup>2</sup> BC HVFX HIGH VOLTAGE CABLE 15343 XXXXX (xxxxx-lot code)	

**Electrical Data**

Conductor Resistance: 0.741 ohms/km (0.226 ohms/kft) @ 20° C nominal  
Voltage Rating: 1000 volts maximum per J1654

**General Data**

Use: High Voltage Power Cables for Electric or Hybrid Vehicles  
Temperature Range: -55° C to +150° C  
Primary Insulation: Meets Requirements of ISO 6722 Thick Wall, Class D  
Weight: 177 lbs/mft

Min. Static Bend Radius: inches mm  
1.5 39



175 HERCULES DRIVE  
COLCHESTER, VT 05446  
802-654-4200

**TITLE**

25.0mm<sup>2</sup> 798/.20mm Bare Copper HVFX Thick Wall  
High Voltage Cable

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONS AND TOLERANCES  
ARE IN INCHES

DRN.	Michael Cienkus	DATE	3/25/2016
CKD.	Nathan Bacon	DATE	3/28/2016
SIZE	PART NUMBER	DOCUMENT NUMBER	
A	15-08222	15343	

DO NOT SCALE THIS DRAWING

The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.

PAGE 1 of 1