


REV.	DESCRIPTION	DATE
0	Initial release.	3/13/2015

General Composition of Cable

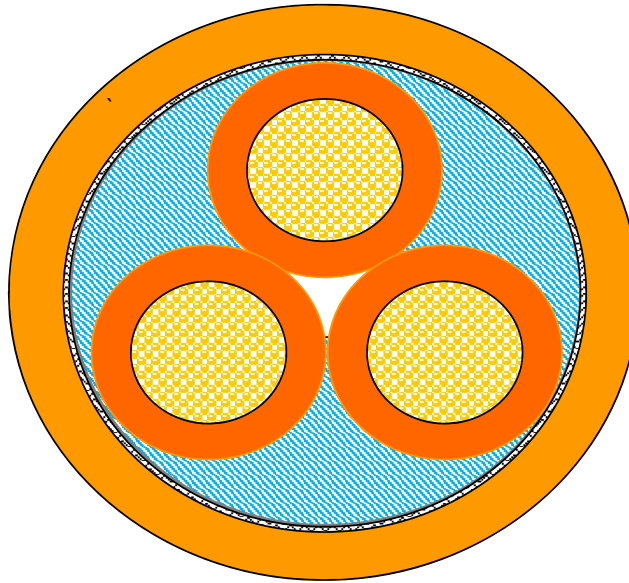

Color Code	Print
1 Orange	One
2 Orange	Two
3 Orange	Three
Jacket Orange	

Physical Data

Description	Dimensions (Nom.)
	inches mm
1. Conductor:	10 AWG 105/30 Bare Copper
2. Insulation:	EXRAD HVFX: wall thickness: 21 mil
3. Filler:	Flame Retardant Polypropylene Fillers
4. Cabling:	Primaries + fillers Lay Length: TBD Direction: Left
5. Shield:	34 AWG Tinned Copper 95% minimum coverage
6. Jacket:	EXRAD XLE wall thickness: 47 mil
Print Legend:	Champlain Cable 3 X 10 HVX-XLE UV 15002 XXXXX XXXXX = Traveler Number

Electrical Data

Conductor Resistance:	1.04 ohms / mft per phase
Conductor CMA:	10500 nom.

General Data

Use:	Hybrid and Electric Vehicles
Temperature Range:	-55° C to +150° C
Primary and Jacket Insulation	Meets Requirements of ISO 6722 Class D 150°C
UV Resistance	Passes UL 720 Hour Exposure to Xenon Light
Maximum Oil Resistance:	60° C
Voltage Rating:	600 Volts AC Max.
Bend Radius:	inches mm
	3.7 94
Weight	204 pounds/kft nom.



TITLE	High Flex Cable (3) Conductor - 10 AWG	
-------	--	--

**UNLESS OTHERWISE SPECIFIED,
DIMENSIONS AND TOLERANCES
ARE IN INCHES**

DO NOT SCALE THIS DRAWING

DRN.	Richard Antic	DATE	3/13/2015
CKD.		DATE	
SIZE	PART NUMBER	DOCUMENT NUMBER	15002
A			

The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.