


# TX6A™ 10Gig™ Shielded Copper Cable – F/UTP

## specifications

Category 6A cable shall be constructed of 23 AWG copper conductors with PE insulation. The copper conductors shall be twisted in pairs and separated by an integrated pair separator. All four pairs shall be surrounded by an overall metallic foil shield within a low smoke zero halogen jacket. The TX6A™ 10Gig™ Shielded Copper Cable must be installed as part of a complete TX6A™ 10Gig™ Shielded Copper Cabling System to achieve 10GBASE-T certified performance.



## technical information

<b>Electrical performance:</b>	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ISO 11801 Class E <sub>A</sub> and ANSI/TIA-568-C.2 Category 6A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the Panduit® TX6A™ 10Gig™ Shielded Copper Cabling System  Certified component performance up to 100 meters and meets or exceeds the component requirement of the IEC 61156-5 and ANSI/TIA-568-C.2 Category 6A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems
<b>Conductors/insulators:</b>	23 AWG solid bare copper wire covered by PE insulation
<b>Flame rating:</b>	IEC 60332-3-25 (-3d), IEC 60754-1 and -2, 61034-2, NBN C 30-004 (F2)
<b>Installation tension:</b>	110 N (25 lbf) maximum
<b>Temperature rating:</b>	-20°C to 75°C (-4°F to 167°F) during installation and operation
<b>Cable jacket:</b>	LSZH
<b>Cable diameter:</b>	7.3mm (0.287 in.) nominal
<b>Cable weight:</b>	16 kg/305m (35 lbs./1000 ft.)
<b>Packaging:</b>	305m or 500m on a reel Package tested to ISTA Procedure 1A

## key features and benefits

<b>Integrated pair divider</b>	Separates pairs for exceptional cable performance
<b>Overall foil shield</b>	Provides superior structural integrity and reduces low frequency external interference to ensure exceptional cable performance at all swept frequencies up to 500 MHz
<b>Internal drain wire</b>	Facilitates means of grounding the cable and provides for efficient performance and protection of network investment
<b>Descending length cable markings</b>	Easy identification of remaining cable reduces installation time and cable scrap
<b>Reel packaging</b>	Supplied 305m (1000 ft.) or 500m (1640 ft.) to a reel

## applications

TX6A™ 10Gig™ Shielded Copper Cable is a component of the Panduit® TX6A™ 10Gig™ Shielded Copper Cabling System. This end-to-end system provides a cost-effective medium for ensuring that network bandwidth needs are easily met today and tomorrow. The shielded cabling system provides high performance, excellent EMI suppression, and aids in secure data transmission. The Panduit solution helps ensure organizations efficiently and reliably meet their data transmission needs.

Usage of the TX6A™ 10Gig™ Shielded Copper Cabling System include high bandwidth applications within data centers and connections to high-end workstations such as:

- 10GBASE-T Ethernet
- Data Center applications
- Virtual business management applications

### TX6A™ 10Gig™ Shielded Copper Cable - F/UTP

**LSZH:** PFZ6X04\*

### TX6A™ 10Gig™ Shielded Jack Module

**Jack module:** CJS6X88TGY

### TX6A™ 10Gig™ Shielded Patch Cords

**Meters:** STP6X\*\*MIG

**Feet:** STP6X\*\*\*IG

### Mini-Com® Angled All Metal Shielded Modular Patch Panels

**24-port, 1 RU:** CPA24BLY

**48-port, 2 RU:** CPA48BLY

**72-port, 2 RU:** CPA72BLY

### Mini-Com® Flat All Metal Shielded Modular Patch Panels

**24-port, 1 RU:** CP24BLY

**48-port, 2 RU:** CP48BLY

**72-port, 2 RU:** CP72BLY

### Cable Prep Tools

**Wire  
snipping tool:** CWST

**Wire  
stripping tool:** CJUST


\*Color and length  
Replace \* with BU-CEG (Blue) or WH-CEG (White) to designate color in a Euro pallet of 18 reels, 305m each.  
Replace \* with BU-CED (Blue) or WH-CED (White) to designate color in a Euro pallet of 12 reels, 500m each.

\*\*For lengths 1 to 10 meters (increments of one meter) and 1.5, 2.5, 15, 20 meters, change the length designation in the part number to desired length. For standard cable colors other than IG (International Gray) substitute IG suffix with BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) to the end of the part number. For example, the part number for a blue, 15-meter patch cord is STP6X15MBU.

\*\*\*For lengths 3 to 20 feet (increments of one foot) and 25, 30, 35, 40 feet, change the length designation in the part number to desired length. For standard cable colors other than IG (International Gray) substitute IG suffix with BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) to the end of the part number. For example, the part number for a blue, 15-foot patch cord is STP6X15BU.

# TX6A™ 10Gig™ Shielded Copper Cable – F/UTP

Mechanical Test	
Ultimate Breaking Strength	>400 N (90 lbf.)
Minimum Bend Radius	8 x cable diameter during installation 4 x cable diameter during operation
Electrical Test	
DC Resistance	<9.38 ohm per 100m (328 ft.)
DC Resistance Unbalance	<5%
Mutual Capacitance	<5.6 nF per 100m (328 ft.) at 1 KHz
Capacitance Unbalance	<300 pF per 100m (328 ft.) at 1 KHz
Characteristic Impedance	100 Ohm +/-15% up to 100 MHz
Nominal Velocity of Propagation (NVP)	ca. 65% nominal
Operating Voltage, Maximum	80V

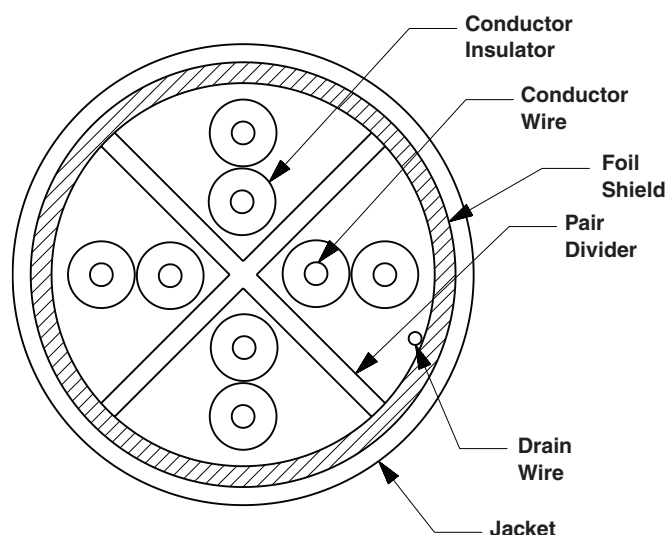

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT**®

©2014 Panduit Corp.  
ALL RIGHTS RESERVED.  
COSP334--WW-ENG  
Replaces WW-COSP187  
11/2014