


Audio/Communication Cable

Unshielded Multiconductor

SPECIFICATIONS

CSA C22.2 No. 214 & CSA C22.2 No. 210.2

CSA FT4 (Vertical Tray Flame Test)

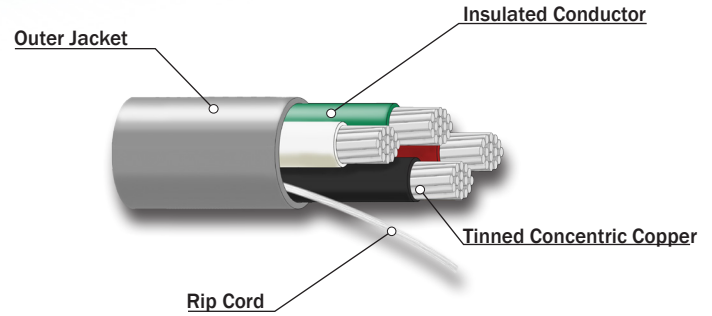

CONSTRUCTION

Conductor: Stranded, tinned copper

Insulation: Semi-rigid Polyvinyl Chloride (PVC)

Outer Jacket: 105°C, Polyvinyl Chloride (PVC), Grey

Voltage: 600V

Options: Various colours for outer jackets

Various compounds and colours available for insulation

Product No.	No. of Conductors	AWG Size	Stranding	Insulation Thickness		Outer Jacket Thickness		Nominal Diameter		Cable Weight		Maximum Pulling Tension		Colour Code Chart
				inches	mm	inches	mm	inches	mm	Lbs/mft	kg/km	lbs	kgs	
74-212	2	24	7/32	0.009	0.23	0.030	0.76	0.151	3.84	11.03	16.45	3	7	3
74-213	3	24	7/32	0.009	0.23	0.015	0.38	0.128	3.25	13.30	19.83	5	11	26
74-214	4	24	7/32	0.009	0.23	0.015	0.38	0.140	3.56	15.83	23.61	7	14	1
74-215	5	24	7/32	0.009	0.23	0.015	0.38	0.147	3.73	18.44	27.50	8	18	1
74-216	6	24	7/32	0.009	0.23	0.023	0.58	0.178	4.52	21.08	31.44	10	22	1
74-217	7	24	7/32	0.009	0.23	0.023	0.58	0.178	4.52	22.94	34.21	11	25	1
74-218	8	24	7/32	0.009	0.23	0.023	0.58	0.196	4.98	25.60	38.18	13	29	1
74-219	9	24	7/32	0.009	0.23	0.023	0.58	0.205	5.21	28.26	42.14	15	32	1
74-220	10	24	7/32	0.009	0.23	0.023	0.58	0.214	5.44	30.96	46.17	16	36	1
74-222	12	24	7/32	0.009	0.23	0.023	0.58	0.229	5.82	35.26	52.58	20	43	1
74-225	15	24	7/32	0.009	0.23	0.023	0.58	0.25	6.35	41.88	62.45	24	54	2
74-227	16	24	7/32	0.009	0.23	0.023	0.58	0.259	6.58	44.38	66.18	26	57	2
74-228	18	24	7/32	0.009	0.23	0.023	0.58	0.265	6.73	48.90	72.92	29	65	2
74-230	20	24	7/32	0.009	0.23	0.023	0.58	0.280	7.11	53.10	79.19	33	72	2
74-235	25	24	7/32	0.009	0.23	0.030	0.76	0.321	8.15	64.39	96.02	41	90	2
74-240	30	24	7/32	0.009	0.23	0.030	0.76	0.342	8.69	75.01	111.86	49	108	2

FOR MORE INFORMATION

150 North Murray St.
Trenton, Ontario
(800) 263 . 3322
www.decacables.com

 ECA CABLES


Audio/Communication Cable

Unshielded Multiconductor

SPECIFICATIONS

CSA C22.2 No. 214 & CSA C22.2 No. 210.2

CSA FT4 (Vertical Tray Flame Test)

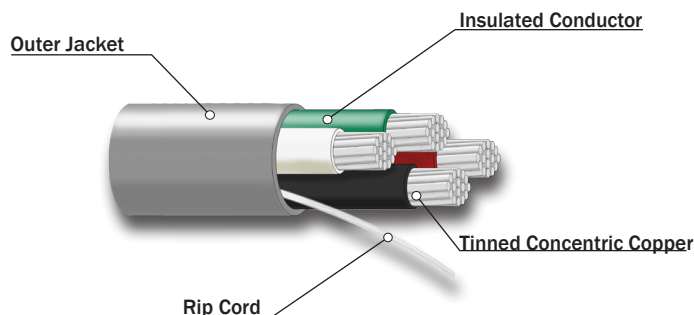

CONSTRUCTION

Conductor: Stranded, tinned copper

Insulation: Semi-rigid Polyvinyl Chloride (PVC)

Outer Jacket: 105°C, Polyvinyl Chloride (PVC), Grey

Voltage: 600V

Options: Various colours for outer jackets

Various compounds and colours available for insulation

Product No.	No. of Conductors	AWG Size	Stranding	Insulation Thickness		Outer Jacket Thickness		Nominal Diameter		Cable Weight		Maximum Pulling Tension		Colour Code Chart
				inches	mm	inches	mm	inches	mm	lbs/mft	kg/km	lbs	kgs	
74-270	2	22	7/30	0.009	0.23	0.015	0.38	0.132	3.35	11.70	17.45	5	11	1
74-273	3	22	7/30	0.009	0.23	0.015	0.38	0.138	3.51	16.90	25.20	8	17	26
74-264	4	22	7/30	0.009	0.23	0.015	0.38	0.150	3.81	15.66	23.35	10	22	1
74-275	5	22	7/30	0.009	0.23	0.023	0.58	0.181	4.60	23.50	35.04	13	28	1
74-276	6	22	7/30	0.009	0.23	0.023	0.58	0.195	4.95	25	37.28	15	34	1
74-277	7	22	7/30	0.009	0.23	0.023	0.58	0.195	4.95	29.80	44.44	18	39	1
74-278	8	22	7/30	0.009	0.23	0.023	0.58	0.217	5.51	34.20	51	20	45	1
74-279	9	22	7/30	0.009	0.23	0.030	0.76	0.245	6.22	38.90	58.01	23	50	1
74-280	10	22	7/30	0.009	0.23	0.023	0.58	0.240	6.10	42.40	63.23	25	56	1
74-282	12	22	7/30	0.009	0.23	0.030	0.76	0.272	6.91	47.80	71.28	30	67	1
74-285	15	22	7/30	0.009	0.23	0.023	0.58	0.280	7.11	57.20	85.30	38	84	2
74-290	20	22	7/30	0.009	0.23	0.030	0.76	0.332	8.43	73.10	109.01	51	112	2
74-295	25	22	7/30	0.009	0.23	0.030	0.76	0.371	9.42	88.60	132.13	64	140	2
74-300	30	22	7/30	0.009	0.23	0.030	0.76	0.388	9.86	103.60	154.50	76	168	2
74-302	2	20	7/28	0.009	0.23	0.015	0.38	0.144	3.66	17.20	25.65	5	11	3
74-303	3	20	7/28	0.009	0.23	0.023	0.58	0.169	4.29	25.60	38.18	8	17	1
74-304	4	20	7/28	0.009	0.23	0.023	0.58	0.183	4.65	31.40	46.83	10	22	1
74-305	5	20	7/28	0.009	0.23	0.023	0.58	0.207	5.26	34.90	52.05	13	28	1
74-306	6	20	7/28	0.009	0.23	0.030	0.76	0.231	5.87	51.77	77.20	15	34	1
74-307	7	20	7/28	0.009	0.23	0.023	0.58	0.217	5.51	48.90	72.92	18	39	1
74-309	9	20	7/28	0.009	0.23	0.023	0.58	0.252	6.40	61.20	91.27	23	50	1
74-310	10	20	7/28	0.009	0.23	0.023	0.58	0.260	6.60	62.40	93.06	25	56	1
74-315	15	20	7/28	0.009	0.23	0.030	0.76	0.320	8.13	103.10	153.75	38	84	2

FOR MORE INFORMATION

150 North Murray St.
Trenton, Ontario
(800) 263 . 3322
www.decacables.com

 ECA CABLES

Audio/Communication Cable

Unshielded Multiconductor

SPECIFICATIONS

CSA C22.2 No. 214 & CSA C22.2 No. 210.2


CSA FT4 (Vertical Tray Flame Test)

CONSTRUCTION

Conductor: Stranded, tinned copper

Insulation: Semi-rigid Polyvinyl Chloride (PVC)

Outer Jacket: 105°C, Polyvinyl Chloride (PVC), Grey

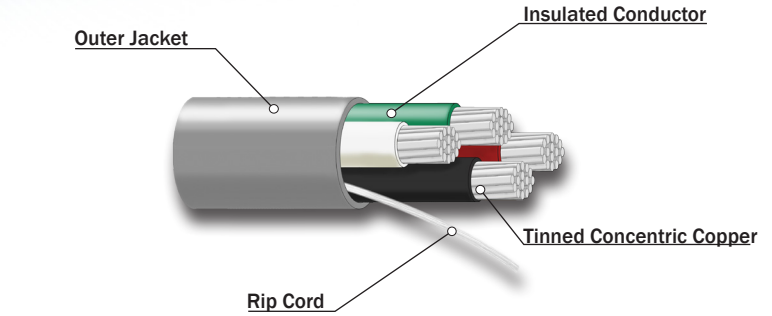

Voltage: 600V

Options: Various colours for outer jackets

Various compounds and colours available for insulation

Product No.	No. of Conductors	AWG Size	Stranding	Insulation Thickness		Outer Jacket Thickness		Nominal Diameter		Cable Weight		Maximum Pulling Tension		Colour Code Chart
				inches	mm	inches	mm	Outer Jacket		Lbs/mft	kg/km	lbs	kgs	
								inches	mm					
74-316	2	18	16/30	0.012	0.3	0.023	0.58	0.192	4.88	25.80	38.47	12	26	1
74-343	3	18	16/30	0.012	0.3	0.023	0.58	0.206	5.23	33.50	49.96	17	38	1
74-319	4	18	16/30	0.012	0.3	0.023	0.58	0.222	5.64	41.70	62.19	23	51	1
74-623	5	18	16/30	0.012	0.3	0.023	0.58	0.249	6.32	50.14	74.77	29	64	1
74-626	6	18	16/30	0.012	0.3	0.023	0.58	0.265	6.73	58.57	87.34	35	77	1
74-627	7	18	16/30	0.012	0.3	0.023	0.58	0.265	6.73	65.55	97.75	41	90	1
74-629	9	18	16/30	0.012	0.3	0.023	0.58	0.315	8	82.48	123	52	115	1
74-632	12	18	16/30	0.012	0.3	0.030	0.76	0.369	9.37	106.01	158.09	70	154	2
74-998	15	18	16/30	0.012	0.3	0.030	0.76	0.402	10.21	128.91	192.24	87	192	2
74-999	25	18	16/30	0.012	0.3	0.030	0.76	0.498	12.65	206.39	307.78	145	320	2
74-328	2	16	26/30	0.015	0.38	0.023	0.58	0.235	5.97	35.64	53.15	19	42	1
74-653	3	16	26/30	0.015	0.38	0.023	0.58	0.244	6.20	47.96	71.52	28	62	1
74-671	4	16	26/30	0.015	0.38	0.023	0.58	0.290	7.37	60.09	89.61	38	83	2
74-655	5	16	26/30	0.015	0.38	0.030	0.76	0.337	8.56	72.67	108.37	47	104	2
74-656	6	16	26/30	0.015	0.38	0.030	0.76	0.342	8.69	85.33	127.25	57	125	2
74-657	7	16	26/30	0.015	0.38	0.030	0.76	0.342	8.69	96.19	143.45	66	146	2
74-659	9	16	26/30	0.015	0.38	0.030	0.76	0.397	10.08	121.56	181.28	85	187	2
74-663	12	16	26/30	0.015	0.38	0.030	0.76	0.452	11.48	158.31	236.08	113	250	2
74-677	15	16	26/30	0.015	0.38	0.030	0.76	0.487	12.37	193.34	288.32	142	312	2

FOR MORE INFORMATION

150 North Murray St.
Trenton, Ontario
(800) 263 . 3322
www.decacables.com

 **ECA CABLES**


Audio/Communication Cable

Unshielded Multiconductor

SPECIFICATIONS

CSA C22.2 No. 214 & CSA C22.2 No. 210.2

CSA FT4 (Vertical Tray Flame Test)

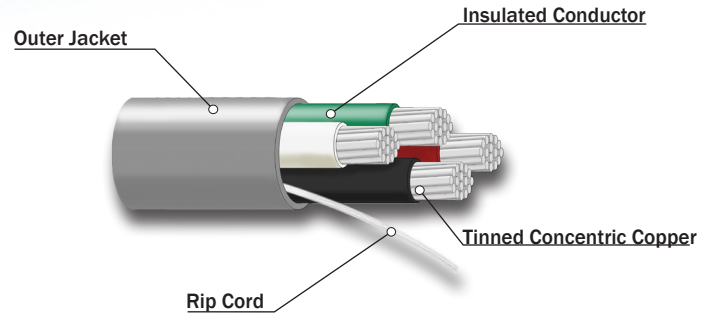

CONSTRUCTION

Conductor: Stranded, tinned copper
Insulation: Semi-rigid Polyvinyl Chloride (PVC)
Outer Jacket: 105°C, Polyvinyl Chloride (PVC), Grey

Voltage: 600V
Options: Various colours for outer jackets
 Various compounds and colours available for insulation

Product No.	No. of Conductors	AWG Size	Stranding	Insulation Thickness		Outer Jacket Thickness		Nominal Diameter		Cable Weight		Maximum Pulling Tension		Colour Code Chart
				inches	mm	inches	mm	inches	mm	Lbs/mft	kg/km	lbs	kgs	
				Outer Jacket										
74-324	2	14	41/30	0.02	0.51	0.03	0.76	0.301	7.65	49.12	73.25	66	30	1
74-684	3	14	41/30	0.02	0.51	0.03	0.76	0.319	8.10	66.60	99.32	98	45	1
74-699	4	14	41/30	0.02	0.51	0.03	0.76	0.350	8.89	84.82	126.49	131	60	1
74-706	6	14	41/30	0.02	0.51	0.03	0.76	0.418	10.62	121.73	181.53	197	89	2
74-708	8	14	41/30	0.02	0.51	0.03	0.76	0.455	11.56	156.66	233.62	262	119	2
74-323	2	12	65/30	0.03	0.76	0.03	0.76	0.381	9.68	75.94	113.25	104	47	1
74-359	3	12	65/30	0.03	0.76	0.03	0.76	0.408	10.36	104.77	156.24	156	71	1
74-361	4	12	65/30	0.03	0.76	0.03	0.76	0.449	11.40	134.59	200.71	208	94	1
74-987	7	12	65/30	0.03	0.76	0.03	0.76	0.554	14.07	223.21	332.87	364	165	2

FOR MORE INFORMATION

150 North Murray St.
 Trenton, Ontario
 (800) 263 . 3322
www.decacables.com

 **ECA CABLES**