



DRK Series Gangable Cable Management Rack Enclosure

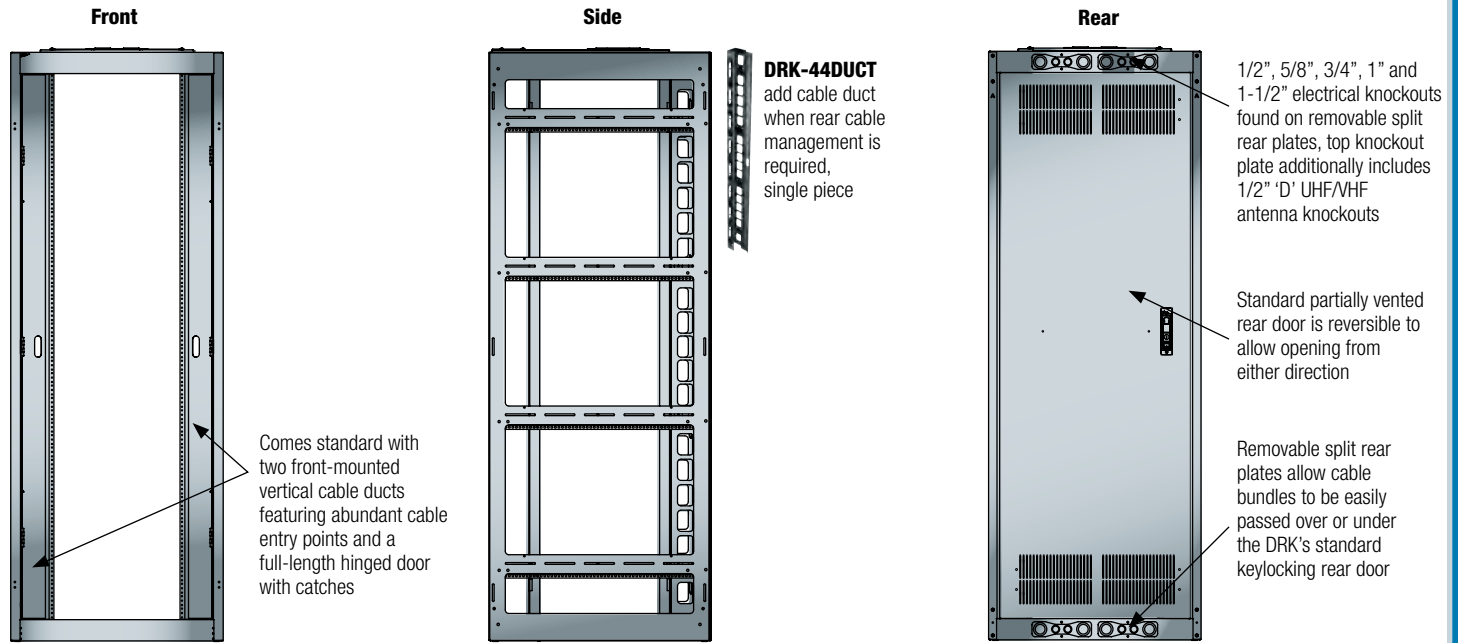


Base of Rack

Stud in the base of rack facilitates proper grounding and bonding of electronic equipment, as per NEBS and NEC standards.



See pg. 117 for grounding and bonding options



Fan Top

Standard 10" fan top comes with a fan guard, 10" fan optional. Or replace with one of many unique configurable top options see pgs. 126-127 for details.

Complete your Rack System with the following options and accessories:

 <p>Power Distribution pgs. 96-117</p>	 <p>Thermal Management pgs. 118-129</p>	 <p>Cable Management pgs. 130-143</p>	 <p>Rack Accessories pgs. 144-169</p>
--	---	---	---

Rack Options: The options listed below are the most widely used accessories for this series of enclosure but is not inclusive of all available items. For additional options and/or more information on the items listed below reference the Enclosure Options section of the catalog.

Part #	Front Doors			Rear Doors				Solid Top	64% Open Area Perf Top	Fan Tops		
	Plexi	25% Open Area	Plexi Vented	Fully Vented	Solid Split	64% Open Area Perf	79% Open Area Split Perf			w/ (4) 4-1/2" Fans (380 CFM Total)	w/ (3) 6" Fans (660 CFM Total)	w/ (1) 10" Fan (550 CFM Total)
DRK19-44-31	DPFD-44	DVFD-44	DPVFD-44	DFVRD-44	DCRD-44	DLVRD-44	DCLVRD-44	MW-ST	MW-LVT	MW-4FT-380CFM	MW-6FT-660CFM	MW-10FT-550CFM
DRK19-44-31PRO	DPFD-44	DVFD-44	DPVFD-44	DFVRD-44	DCRD-44	DLVRD-44	DCLVRD-44	MW-ST	MW-LVT	MW-4FT-380CFM	MW-6FT-660CFM	MW-10FT-550CFM
DRK19-44-36	DPFD-44	DVFD-44	DPVFD-44	DFVRD-44	DCRD-44	DLVRD-44	DCLVRD-44	MW-ST	MW-LVT	MW-4FT-380CFM	MW-6FT-660CFM	MW-10FT-550CFM
DRK19-44-36PRO	DPFD-44	DVFD-44	DPVFD-44	DFVRD-44	DCRD-44	DLVRD-44	DCLVRD-44	MW-ST	MW-LVT	MW-4FT-380CFM	MW-6FT-660CFM	MW-10FT-550CFM
DRK19-44-42	DPFD-44	DVFD-44	DPVFD-44	DFVRD-44	DCRD-44	DLVRD-44	DCLVRD-44	MW-ST	MW-LVT	MW-4FT-380CFM	MW-6FT-660CFM	MW-10FT-550CFM
DRK19-44-42PRO	DPFD-44	DVFD-44	DPVFD-44	DFVRD-44	DCRD-44	DLVRD-44	DCLVRD-44	MW-ST	MW-LVT	MW-4FT-380CFM	MW-6FT-660CFM	MW-10FT-550CFM
DRK19-44-31K	included	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	MW-10FT (incl.)

for more info refer to pgs. 32-35



Enclosure Options

Thermal Management Kits for Rear Door

Middle Atlantic Products standard solid rear doors on WRK, MRK and ERK Series enclosures are configurable for achieving optimal active or passive thermal management. Fan, vent and filter kits are available to install after laser knockouts are removed. Fan and vent kits now available for solid split rear doors.



KO-AWFP2




KO-VT3



KO-FILTER3

WRK, MRK, ERK Standard Solid Rear Doors	
Part #	Description
KO-AWFP2	fan kit with two fans, 190 CFM
KO-VT3	vent panel kit
KO-FILTER3	filter kit
KO-WSB3	blank panel kit

Solid Split Rear Doors	
Part #	Description
KO-CRD-FAN	fan kit with two fans, 190 CFM and two vents
KO-CRD-VT	filter kit

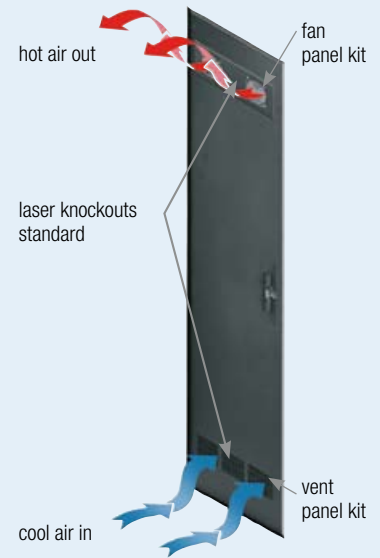


Optional Doors

Substitute a vented rear door for a solid rear door in selected sizes. Black textured powder coat finish. See web for racks available 'less rear door' (LRD). Fully vented rear doors have 64% open area. Split rear doors with 3 point latch offer 79% open area and require less floor space when accessing rear equipment connections.



Rear Door Part # (Fits WMRK, MRK, VRK, VMRK, WRK Series)				Fits ERK Only	# of Rackspace
Top & Bottom Slot Vented	79% Open Area Split Perf	64% Open Area Perf	Solid Split	Top & Bottom Slot Vented	
-	MW-CLVRD-45	-	MW-CRD-45	-	45
MW-VRD-44	MW-CLVRD-44	MW-LVRD-44	MW-CRD-44	ERK-VRD-44	44
-	MW-CLVRD-42	-	MW-CRD-42	-	42
-	-	MW-LVRD-40	-	ERK-VRD-40	40
-	-	-	-	ERK-VRD-35	35
-	-	-	-	ERK-VRD-27	27
-	MW-CLVRD-24	-	MW-CRD-24	-	24
-	-	-	-	ERK-VRD-21	21
-	-	-	-	ERK-VRD-18	18

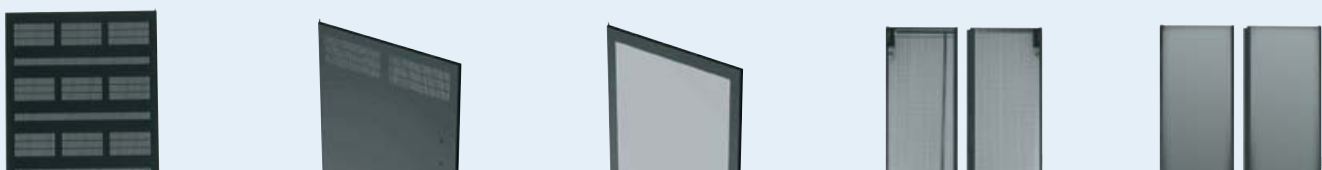

Rear Door Part # (Fits DRK Series)				
Slot Vents Fully Vented	Top & Bottom Slot Vented	64% Open Area Perf	79% Open Area Split Perf	Solid Split
DFVRD-44	DVRD-44	DSVRD-44	DCLVRD-44	DCRD-44

