


**GeneralCable**  
**SINGLE CONDUCTOR #4AWG**  
**125C 2000V**

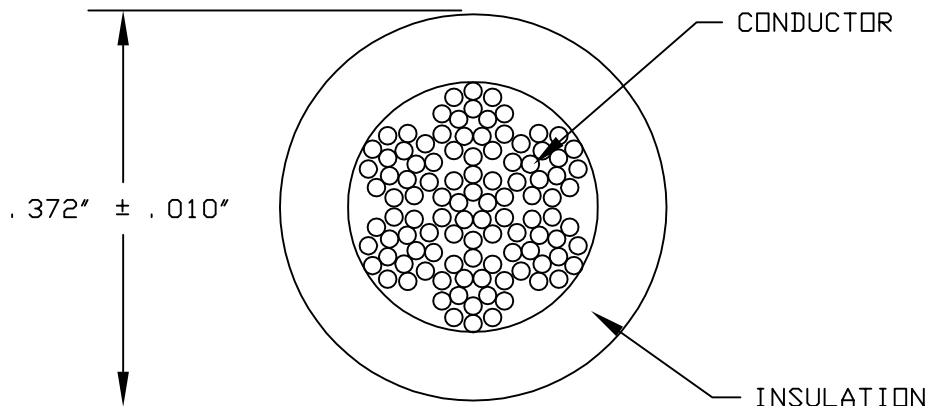

MATERIAL

CONDUCTOR: #4AWG 105/24 ROPE (7X15/24) TINNED COPPER  
 INSULATION: POLYRAD XT-.055" NOMINAL WALL  
 IRRADIATED CROSSLINKED POLYOLEFIN  
 DIAMETER: .372" NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.262"  
 TEMPERATURE: 125° C  
 VOLTAGE: 2000V RMS  
 CABLE WEIGHT: 177 LBS/1000 FT.  
 FLAME: PASSES FT4/IEEE 1202 VERTICAL TRAY  
 70,000 BTU FLAME TEST

GeneralCable PART NUMBER

238880.00

COLOR

BLACK

PRINT LEGEND

\*68A9379P 2000V 4AWG 105STRD 125C GENERAL CABLE BRAND REX  
 BRAND (WC) XP0457105 POLYRAD XT TYPE BR781 MONTH/DAY/YEAR\*  
 PLUS SEQUENTIAL FOOTAGE MARKS EVERY TWO FEET

REVISIONS	O	05/08/08	FIRST ISSUE
	A	01/19/11	UPDATE
	B	03/07/13	ADD FLAME TEST

**GeneralCable**  
 1600 West Main Street, Willimantic, CT 06226-1128  
The Power of One

DRAWING NO: 11-1278

REFERENCES	IEWC/GE P/N 68A9379P4
	GeneralCable P/N 238880.00

DRAWN BY: CAD	APPROVED BY: M. LAJEUNESSE
THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	