


GeneralCable
TWO CONDUCTOR #12AWG
SHIELDED 125C 600V CABLE

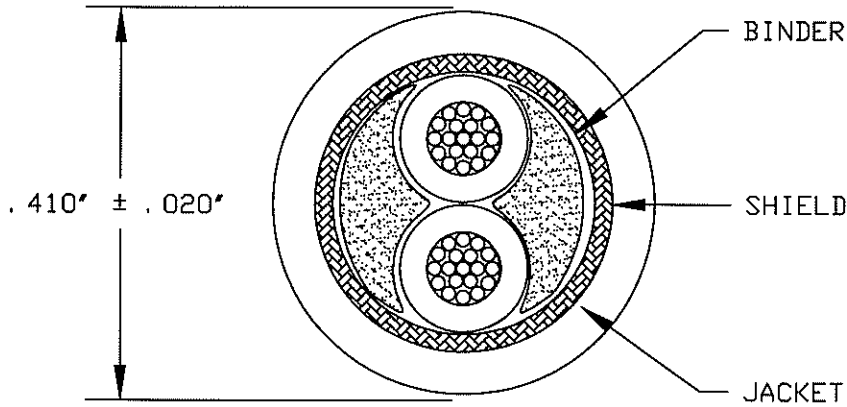

COMPONENTS - CONDUCTOR: #12AWG 19/25 TINNED COPPER
 (ITEMS 1-2) INSULATION: POLYRAD XT-.031' NOMINAL WALL
 IRRADIATED CROSSLINKED POLYOLEFIN
 DIAMETER: .146' NOMINAL

CABLE - TWO (2) COMPONENTS (ITEMS 1-2) & FILLERS
 CABLED TOGETHER WITH A LEFT HAND LAY

BINDER - .001' MYLAR TAPE-25% OVERLAP

SHIELD - #36AWG TINNED COPPER BRAID-85% MIN COVERAGE

JACKET - POLYRAD XT (DARK GRAY)-.045' NOMINAL WALL
 IRRADIATED CROSSLINKED POLYOLEFIN

DIAMETER: .410' NOMINAL

RATINGS - 125°C 600V

NET CABLE WGT - 118 LBS/1000'

PRINT LEGEND - *GENERAL CABLE BRAND REX BRAND (WC) POLYRAD XT
 T-15502 2/C 12AWG SHIELDED 125C 600V'

COLOR CODE -	ITEM NUMBER	COLOR
	1	BLACK
	2	WHITE

REVISIONS	0	03/25/04	FIRST ISSUE	<p>GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u></p>
	A	03/31/04	ADD PART NUMBER	
DRAWING NO: 11-783				
REFERENCES	TTA		DRAWN BY: W. DRABEK	APPROVED BY: M. LAJEUNESSE
	GeneralCable P/N 373750 T-15502 (2/12)			THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable
	2/C 12AWG SHIELDED			