


**GeneralCable**  
**TWO CONDUCTOR #14AWG SHIELDED**  
**POLYRAD XT 125°C 600V**

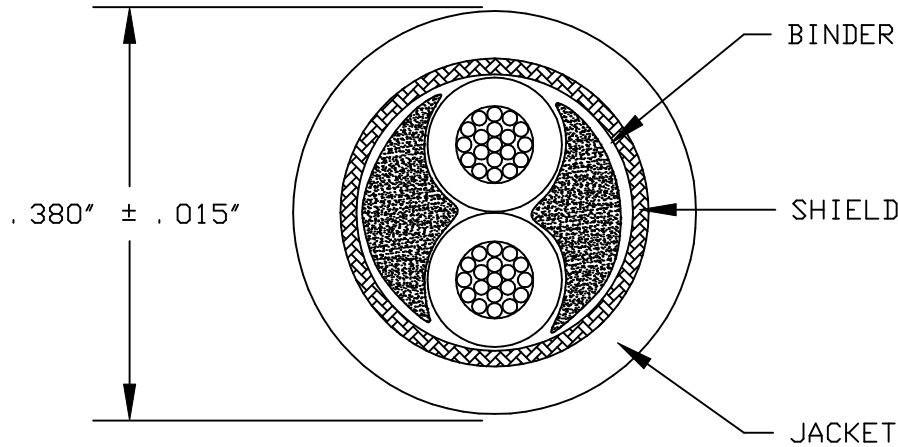

COMPONENTS -  
 (ITEMS 1-2)

CONDUCTOR: #14AWG 19/27 TINNED COPPER  
 INSULATION: POLYRAD XT-.030" NOMINAL WALL  
 IRRADIATED CROSSLINKED POLYOLEFIN  
 DIAMETER: .127" NOMINAL

CABLE -

TWO (2) COMPONENTS (ITEMS 1-2) + TWO (2) FLAME  
 RETARDANT FILLERS CABLED TOGETHER WITH A 2.75" L. H. LAY

BINDER -

.001" MYLAR TAPE-25% MIN OVERLAP

SHIELD -

#36AWG TINNED COPPER BRAID-85% MIN COVERAGE

JACKET -

POLYRAD XT (BLACK)-.045" NOMINAL WALL  
 IRRADIATED CROSSLINKED POLYOLEFIN

DIAMETER:

.380" NOMINAL

TEMPERATURE -

125°C

VOLTAGE -

600V

NET CABLE WGT -

88 LBS/1000'

JACKET PRINT -

"GENERAL CABLE BRAND REX BRAND (WC) T-75136  
 2/C 14AWG SHIELDED POLYRAD XT 600V YEAR/MONTH"

COLOR CODE -

ITEM NUMBER	COLOR
1	BLACK
2	WHITE

ELECTRICALS -

CONDUCTOR DCR - 2.79 OHMS/1000' MAXIMUM @ 20°C

IMPEDANCE - 60 OHMS NOMINAL

CAPACITANCE - 29.5 pF/FT NOMINAL

REVISIONS	0	05/07/08	FIRST ISSUE
	A	07/13/09	ADD ELECTRICALS

**GeneralCable**  
 1600 West Main Street, Willimantic, CT 06226-1128  
The Power of One

DRAWING NO: 11-1277

REFERENCES	GeneralCable P/N 285100 T-75136 (2/14)

DRAWN BY: CAD APPROVED BY: M. LAJEUNESSE

THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable