


**GeneralCable**  
**SINGLE CONDUCTOR #16AWG**  
**125C 600V**

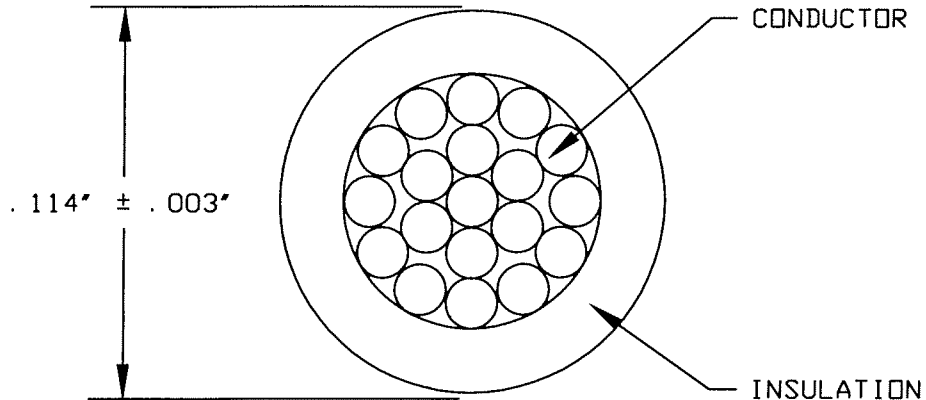

MATERIAL

CONDUCTOR: #16AWG 19/29 TINNED COPPER  
 INSULATION: POLYRAD XT-.030" NOMINAL WALL  
 IRRADIATED CROSSLINKED POLYOLEFIN  
 DIAMETER: .114" NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.054" NOMINAL  
 CONDUCTOR DCR: 4.43 OHMS/1000' MAX @ 20°C  
 TEMPERATURE: 125°C  
 VOLTAGE: 600V RMS  
 CABLE WEIGHT: 13 LBS/1000 FT.  
 PUT-UP: 16,500' /30" DRUM

GeneralCable PART NUMBER

269620.00.61

PRINT LEGEND

\*GC 41A313392DAP1 16AWG MONTH/YEAR\*

REVISIONS	0	09/08/05	FIRST ISSUE	<b>GeneralCable</b> 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u>	
	A	06/30/08	CHANGE PRINT LEGEND		
				DRAWING NO: 11-954	
REFERENCES	GE 41A313392DAP1			DRAWN BY: CAD	APPROVED BY: M. LAJEUNESSE
	GeneralCable P/N 269620.00.61			THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	