


GeneralCable
SINGLE CONDUCTOR #16AWG
125C 600V

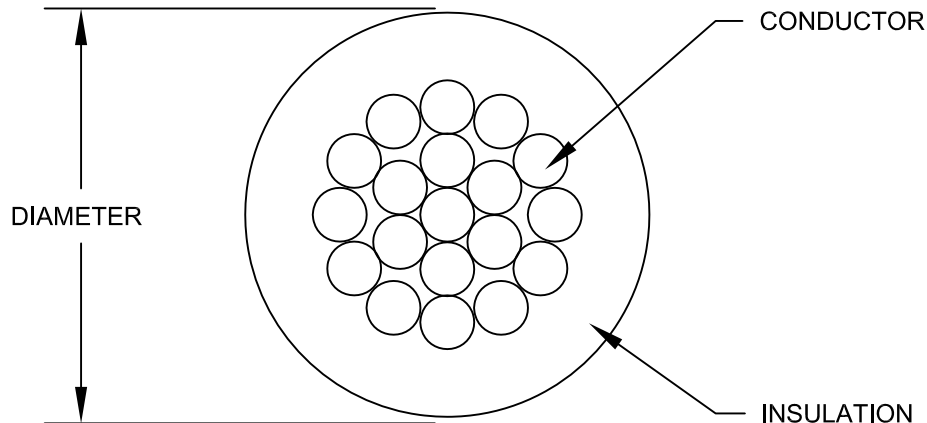

MATERIAL

CONDUCTOR: #16AWG 19/29 TINNED COPPER
 INSULATION: POLYRAD XT 0.030" NOMINAL WALL IRRADIATED CROSSLINKED POLYOLEFIN
 DIAMETER: 0.114" NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.054" NOMINAL
 CONDUCTOR DCR: 4.59 OHMS/1000' @ 25°C
 TEMPERATURE: 125°C
 VOLTAGE: 600V RMS
 CABLE WEIGHT: 13 LBS/1000 FT.
 COLOR: WHITE

PRINT LEGEND

GC 41A313392DAP1 16AWG MONTH/YEAR

REVISIONS	0	01/26/09	FIRST ISSUE
	A	03/09/17	UPDATE FORMAT, VALUES



1600 West Main Street, Willimantic, CT 06226-1128

DRAWING NO: **11-1316**

REFERENCES	GE P/N: 41A313392DAP1
	GENERAL CABLE P/N: 269620.09.61

DRAWN BY: R.HALLER APPROVED BY: E..ABERBACH

THIS DRAWING IS THE PROPERTY OF GENERAL CABLE AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GENERAL CABLE.