


GeneralCable  
SINGLE CONDUCTOR #1/0AWG  
125C 2000V

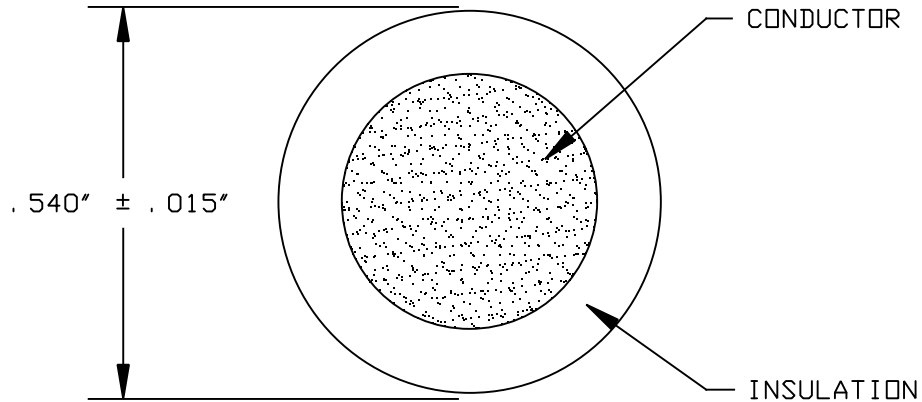

MATERIAL

CONDUCTOR: #1/0AWG 273/24 ROPE (39X7/24) TINNED COPPER- .410" NOM. O. D.  
INSULATION: IRRADIATION CROSS-LINKED POLYOLEFIN- .065" NOM. WALL  
DIAMETER: .540" NOMINAL

REQUIREMENTS

TEMPERATURE: 125° C  
VOLTAGE: 2000V RMS  
CABLE WEIGHT: 418 LBS/1000 FT.

GeneralCable PART NUMBER

249000.00

PRINT LEGEND

68A9378PO 125C 600V 1/0AWG 259STRAND STYLE 3271 RU AWM GENERAL CABLE  
XP1/067275 POLYRAD XT TYPE BR781MONTH/DAY/YEAR SEQUENTIAL FOOTAGE MARK

REVISIONS	0	08/24/15	FIRST ISSUE	<p style="font-size: 1.2em; margin: 0;">GeneralCable</p> <p style="margin: 0;">1600 West Main Street, Willimantic, CT 06226-1128</p> <p style="font-weight: bold; margin: 0;">The Power of One</p>
REFERENCES	GE 68A9379			<p style="margin: 0;">DRAWING NO: <span style="font-size: 1.5em;">11-1975</span></p>
	GeneralCable P/N 249000.00			
			DRAWN BY: CAD	APPROVED BY: T. WATERS
<p>THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable</p>				