


GeneralCable
THREE CONDUCTOR SHIELDED #20AWG

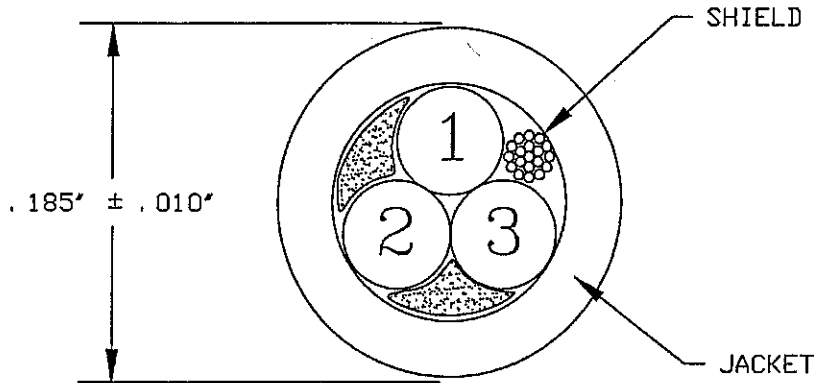

- COMPONENTS - CONDUCTOR: #20AWG 19/32 TINNED COPPER
 (ITEMS 1-3) INSULATION: POLYRAD XT-.016' NOMINAL WALL
 IRRADIATED CROSSLINKED POLYOLEFIN
 DIAMETER: .070' NOMINAL
- CABLE - THREE (3) COMPONENTS (ITEMS 1-3) & TWO (2) FILLERS &
 ONE (1) DRAIN WIRE CABLED TOGETHER WITH A L. H. LAY
- DRAIN WIRE - #20AWG 19/32 TINNED COPPER
- SHIELD - .0015' ALUMINUM/MYLAR TAPE-25% MIN OVERLAP-
 ALUMINUM SIDE IN AGAINST DRAIN WIRE
- JACKET - POLYRAD XT -.015' NOMINAL WALL
 IRRADIATED CROSSLINKED POLYOLEFIN
- DIAMETER - .185' NOMINAL
- TEMPERATURE - 125°C
- VOLTAGE - 600V
- NET CABLE WGT - 29 LBS/1000'
- JACKET PRINT - 'GENERAL CABLE BRAND REX BRAND (WC) POLYRAD XT 125C
 3/C 20AWG SHIELDED 600V GE P/N 41A313392DFP2 (D)'
- COLOR CODE -
- | ITEM NUMBER | COLOR |
|-------------|-------|
| 1 | BLACK |
| 2 | WHITE |
| 3 | RED |

REVISIONS	0	01/28/05	FIRST ISSUE	GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u>
REFERENCES	GE 41A313392DFP2			DRAWING NO: 11-891 DRAWN BY: W. DRABEK APPROVED BY: M. LAJEUNESSE THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable
	GeneralCable PART #T-75214 (3/18)			
	#365860.00.77			