


GeneralCable

TWO PAIR #20AWG SHIELDED

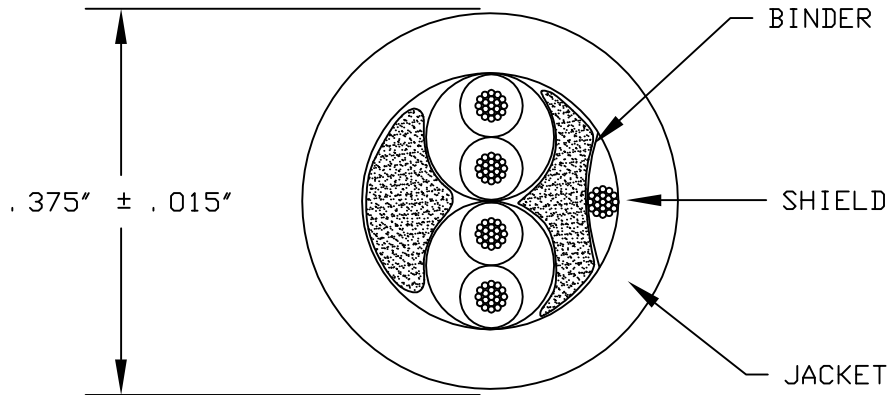

COMPONENTS - CONDUCTOR: #20AWG 19/32 TINNED COPPER
 (ITEMS 1-2) INSULATION: POLYRAD XT-.020" NOMINAL WALL
 IRRADIATED CROSSLINKED POLYOLEFIN
 DIAMETER: .079" NOMINAL

TWISTED PAIR:
 TWO (2) OF THE ABOVE PRIMARIES TWISTED;
 TOGETHER WITH A L. H. LAY:

CABLE - TWO (2) COMPONENTS (ITEMS 1-2) + TWO (2) FLAME
 RETARDANT FILLERS CABLED TOGETHER WITH A L. H. LAY

BINDER - MYLAR TAPE-25% MINIMUM OVERLAP

DRAIN WIRE- #20AWG 19/32 TINNED COPPER

SHIELD - .0015" ALUMINUM/MYLAR TAPE-50% MINIMUM OVERLAP

JACKET - POLYRAD XT -.045" NOMINAL WALL
 IRRADIATED CROSSLINKED POLYOLEFIN

DIAMETER - .375" NOMINAL

TEMPERATURE - 125°C

VOLTAGE - 300V

NET CABLE WGT - 66 LBS/1000'

JACKET PRINT - "GENERAL CABLE BRAND REX BRAND (WC) POLRAD XT 125C 2PR
 20AWG SHIELDED 300V GE P/N 41A313153CEP8 (D)YEAR/MONTH"

COLOR CODE -

ITEM NUMBER	COLOR	PRINT
1	BLACK	1
	WHITE	2
2	BLACK	3
	WHITE	4

REVISIONS	0	11/15/12	FIRST ISSUE	<h3 style="margin: 0;">GeneralCable</h3> <p style="margin: 0;">1600 West Main Street, Willimantic, CT 06226-1128</p> <p style="margin: 0;"><u>The Power of One</u></p>	
				DRAWING NO: 11-1908	
				DRAWN BY: CAD APPROVED BY: M. LAJEUNESSE	
				THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	
REFERENCES	GE #41A314153 CE8				
	GeneralCable P/N 365800.00.77				