


# GeneralCable

## THREE CONDUCTOR SHIELDED #22AWG

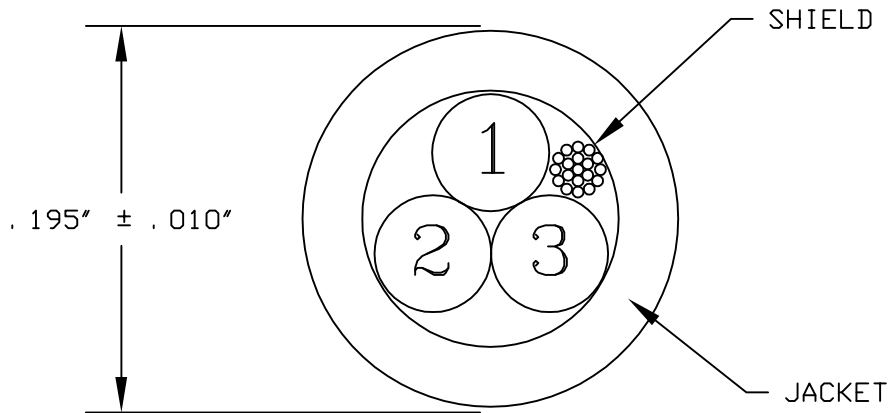

- COMPONENTS - CONDUCTOR: #22AWG 19/34 TINNED COPPER  
 (ITEMS 1-3) INSULATION: POLYRAD XT-.016" NOMINAL WALL  
 IRRADIATED CROSSLINKED POLYOLEFIN  
 DIAMETER: .061" NOMINAL
- CABLE - THREE (3) COMPONENTS (ITEMS 1-3) + ONE (1) DRAIN WIRE CABLED TOGETHER WITH A L. H. LAY
- DRAIN WIRE - #22AWG 19/34 TINNED COPPER
- SHIELD - .0015" ALUMINUM/MYLAR TAPE-25% MIN OVERLAP-ALUMINUM SIDE IN AGAINST DRAIN WIRE
- JACKET - POLYRAD XT (BLACK)-.030" NOMINAL WALL  
 IRRADIATED CROSSLINKED POLYOLEFIN
- DIAMETER - .195" NOMINAL
- TEMPERATURE - 125°C
- VOLTAGE - 600V
- NET CABLE WGT - 24 LBS/1000'
- JACKET PRINT - "GENERAL CABLE BRAND REX BRAND (WC) POLYRAD XT 125C 3/C 22AWG SHIELDED 600V GE P/N 41A313392DFP1 (D) YEAR/MONTH"

COLOR CODE -	ITEM NUMBER	COLOR
	1	BLACK
	2	WHITE
	3	RED

REVISIONS	0	01/28/05	FIRST ISSUE	<h3>GeneralCable</h3> <p>1600 West Main Street, Willimantic, CT 06226-1128</p> <h3>The Power of One</h3>	
	A	08/08/07	UPDATE		
				DRAWING NO: 11-892	
REFERENCES	GE 41A313392DFP1			DRAWN BY: CAD	APPROVED BY: M. LAJEUNESSE
	GeneralCable P/N 365850.00.77			THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	
	T-75214 (3/22)				