


GeneralCable
SINGLE CONDUCTOR #22AWG
125C 600V

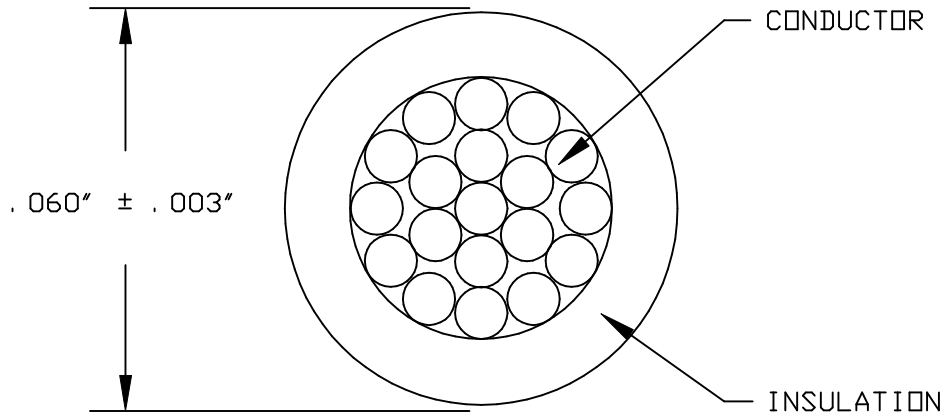

MATERIAL

CONDUCTOR: #22AWG 19/34 TINNED COPPER
 INSULATION: POLYRAD XT-.015" NOMINAL WALL
 IRRADIATED CROSSLINKED POLYOLEFIN
 DIAMETER: .060" NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.0295" NOMINAL
 CONDUCTOR DCR: 15.5 OHMS/1000'
 TEMPERATURE: 125°C
 VOLTAGE: 600V RMS
 CABLE WEIGHT: 3.59 LBS/1000 FT.
 PUT-UP: 20,000' /15" DRUM

GeneralCable PART NUMBER

275900.00.60

PRINT LEGEND

"GC 41A313392DAP19 22AWG"

REVISIONS	0	08/11/06	FIRST ISSUE
	A	06/26/08	PRINT LEGEND

GeneralCable
 1600 West Main Street, Willimantic, CT 06226-1128
The Power of One

DRAWING NO: 11-995

REFERENCES	GE 41A313392DAP19
	GeneralCable P/N 275900.00.60
	XP221619-TRAN-GE

DRAWN BY: W. DRABEK	APPROVED BY: M. LAJEUNESSE
THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	