

INSULATE
SEAL
PROTECT

>3:1
SHRINK RATIO



HEAT SHRINK CABLE REPAIR SLEEVE


ADHESIVE LINED, HEAT SHRINK WRAPAROUND SLEEVE THAT IS CLOSED WITH A FLEXIBLE STAINLESS-STEEL LOCKING CHANNEL. USED FOR GENERAL RE-JACKETING AND SEALING APPLICATIONS, PROTECTION OF DAMAGED CABLE OR REPAIR OF CABLE JOINTS. INSTALLS EASILY IN SPLICE APPLICATIONS THAT ARE LONGER IN LENGTH

FEATURES AND BENEFITS

- >3:1 shrink ratio
- Provides water tight seal upon recovery
- Offers mechanical durability
- Application procedure is quick, simple and clean
- Sleeve and channel can be cut to suit short application requirements
- Steel channel provides permanent closure system
- Installation temperature range: -15°C to 45°C

TYPICAL APPLICATIONS

- Cable jacket repair
- Primary insulation cover on low voltage cables
- Re-jacketing cover for power cables

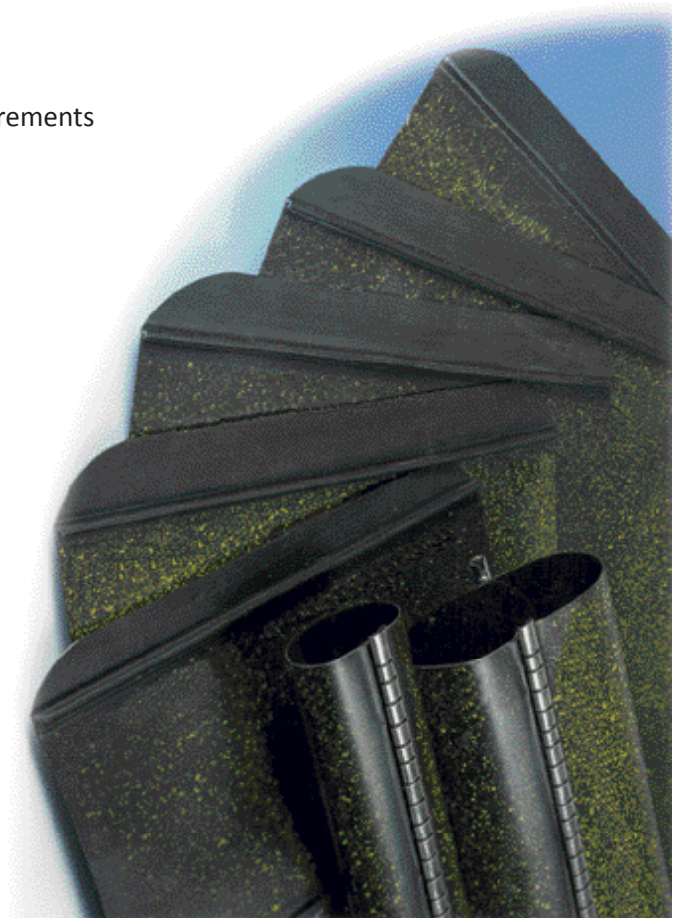

DIMENSIONS

ORDER NUMBER	EXPANDED ID		RECOVERED ID		RECOVERED WALL THICKNESS		SLEEVE LENGTH	
	MM	IN	MM	IN	MM	IN	MM	IN
CRDW-1	43	1.69	8	0.32	2.3	0.09	1219	48
CRDW-2	75	2.95	15	0.59	2.3	0.09	1219	48
CRDW-3	93	3.66	25	0.98	2.3	0.09	1219	48
CRDW-4	137	5.39	34	1.34	2.3	0.09	1219	48
CRDW-5	160	6.30	48	1.89	2.3	0.09	1219	48
CRDW-6	200	7.87	48	1.89	2.3	0.09	1219	48

ORDERING

- Select a dimension which will shrink snugly over the component to be covered. Allow for a minimum of 76 mm (3 in) length overlap beyond each end of the area to be covered.
- Please specify the product name plus the options you require
- Order Example: CRDW-1
- Standard Product: Black, 48 in length

Please contact your Customer Service Representative for information on custom lengths and material data sheet.