


GeneralCable

TWO CONDUCTOR SHIELDED #14AWG

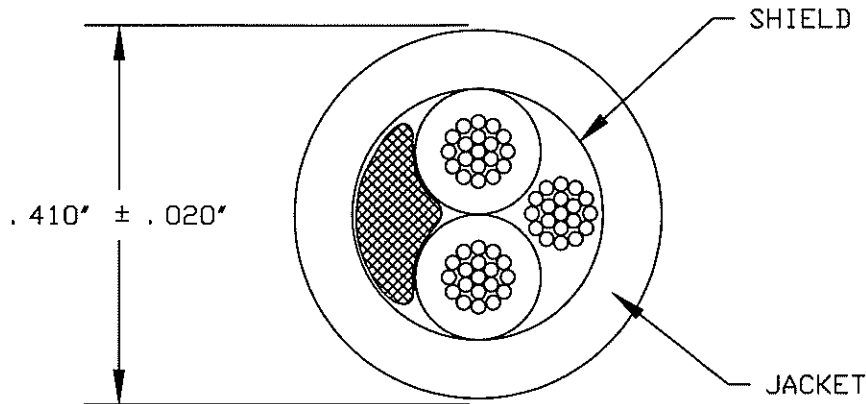

- COMPONENTS - CONDUCTOR: #14AWG 19/27 TINNED COPPER
 (ITEMS 1-2) INSULATION: POLYRAD XT-.046" NOMINAL WALL
 125°C IRRADIATED CROSSLINKED POLYOLEFIN
 DIAMETER: .157" NOMINAL
- CABLE - TWO (2) COMPONENTS (ITEMS 1-2) & ONE (1) FILLER &
 ONE (1) DRAIN WIRE CABLED TOGETHER WITH A L. H. LAY
- DRAIN WIRE - #14AWG 19/.0147 TINNED COPPER
- SHIELD - .0015" ALUMINUM/MYLAR TAPE-25% MIN OVERLAP-
 ALUMINUM SIDE IN AGAINST DRAIN WIRE
- JACKET - POLYRAD XT -.045" NOMINAL WALL
 125°C IRRADIATED CROSSLINKED POLYOLEFIN
- DIAMETER - .410" NOMINAL
- TEMPERATURE - 125°C
- VOLTAGE - 2000V
- NET CABLE WGT - 99 LBS/1000'
- JACKET PRINT - *GENERAL CABLE BRAND REX BRAND (WC) 2/C 14AWG
 125C 2000V POLYRAD XT/SHLD/POLYRAD XT*

COLOR CODE -	ITEM NUMBER	COLOR
	1	BLACK
	2	WHITE

REVISIONS	0	08/05/02	FIRST ISSUE	<h3>GeneralCable</h3> <p>1600 West Main Street, Willimantic, CT 06226-1128</p> <p><u>The Power of One</u></p>	
	A	01/25/06	UPDATE		
				DRAWING NO: 11-523	
REFERENCES	IEWC			DRAWN BY: W. DRABEK	APPROVED BY: M. LAJEUNESSE
	GeneralCable PART #T-75196 (2/14)			THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	
	#355240				