

7110


HD/SD/ASI Reclocking DA

The Avenue 7110 module is dual-rate serial digital distribution amplifier with automatic cable equalization and reclocking. It automatically detects and operates at 270 Mb/s for Standard Definition (525 or 625) signals and at 1.485 Gb/s for High Definition signals. It also can be used with DVB-ASI signals. The module has one input and eight outputs. The module can be used in either the 3RU or 1RU Avenue frame.

Input signal presence and bit rate can be monitored through the Avenue Control System and it is also indicated by LED indicators on the front edge of the module. On loss of signal, the 7110 can generate an alarm that is monitored through Avenue PC.

Features

- **HD/SD/ASI Distribution Amplifier**
- **Supports all HD, SD and ASI standards**
- **Auto-senses standard definition or high definition input**
- **Reclocked outputs**
- **Auto EQ**
- **Alarm on loss of signal**
- **Passes embedded audio**

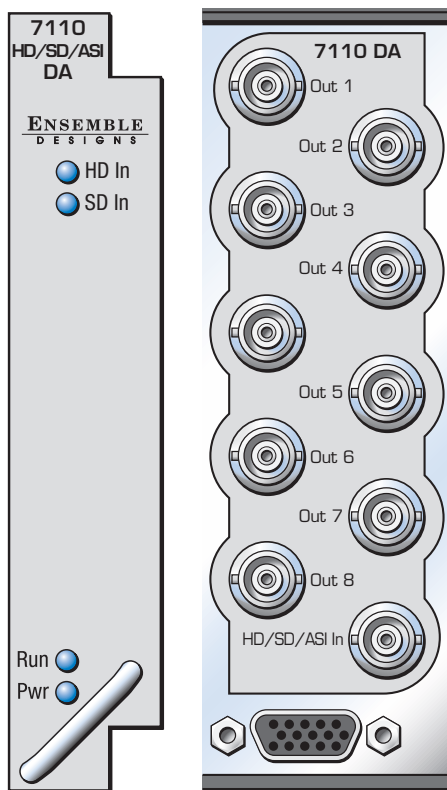

Serial Digital Input

Number	One
Signal Type	HD Serial Digital 1.485 Gb/s, SMPTE 274M, 292M or 296M or SD Serial Digital 270 Mb/s, SMPTE 259M or DVB-ASI 270 Mb/s
Impedance	75 Ω
Return Loss	>15 dB
Max Cable Length	270 Mb/s 300 meters Belden 1694A 1.485 Gb/s 100 meters Belden 1694A

Automatic Cable Input Equalization

Serial Digital Output

Number	Eight (SD, HD) or Four (ASI) ASI on outputs 2, 4, 6, 8
Signal Type	Follows input
Impedance	75 Ω
Return Loss	>15 dB
Output DC	None (AC coupled)

General Specifications

Power Consumption	<7.0 watts
Temperature Range	0 to 40°C ambient (all specs met)
Relative Humidity	0 to 95%, noncondensing
Altitude	0 to 10,000 ft

