



DATA SHEET	73000024
EPIC® POWER LS1 D6 3+PE+4 K	Valid from: 19.11.2015

Description

- Circular connectors for servomotors and power supply
- High power at smallest installation space
- Optimal solution for electric motors
- EMC-optimised design
- Safety use in field environment by high protection class



General Characteristics

Series	POWER LS 1
Version	Short, Cable connector for female contacts
Pin configuration	3+PE+4
Rated voltage (V)	630 V (2mm Contacts) 250 V (1mm Contacts)
Rated impulse voltage	6 kV (2mm Contacts) 4 kV (1mm Contacts)
Rated current (A)	25A/3+PE+4 (2mm Contacts) 7A (1mm Contacts)
Contact resistance	< 4 mOhm
Contacts	Gold plated brass
Number of contacts	3+PE+4
Termination methods	Crimp termination: 0.5 – 4.0 mm ² (2 mm contacts) Crimp termination: 0.14 - 1.0 mm ² (1 mm contacts)
Protection	IP 68
Cycle of mechanical operation	500
Temperature range	-25°C to +125°C
Degree of soiling	3

Product Variations

Article- Number	Article	Contacts included	Cable clamping range mm	Pin configuration
Type LS1 D6 short, Cable connector, 8-pin for female contacts				
73000024	LS1 D6	8	8,5 - 11	3+PE+4
73000026	LS1 D6		8,5 - 11	3+PE+4
73000025	LS1 D6	8	10,5 - 15,5	3+PE+4
73000027	LS1 D6		10,5 - 15,5	3+PE+4
76124100	LS1 D6	8	7,5 - 15,5	3+PE+4
76124610	LS1 D6		7,5 - 15,5	3+PE+4

Materials and Surfaces

Housing	Nickel-plated zinc die-casting, nickel-plated brass
Insert	PA
Seal	FPM

Creator: MANU2/PDP Released: IVSE1/PDP	Document: DB73000024EN Version: 01	Page 1 of 3
---	---------------------------------------	-------------



DATA SHEET	73000024
EPIC® POWER LS1 D6 3+PE+4 K	Valid from: 19.11.2015


Approvals

VDE-Approval, VDE-REG.-Nr. B25
UL-File-Number E249137

Standard

Product Standard IEC 61984

Technical Drawings

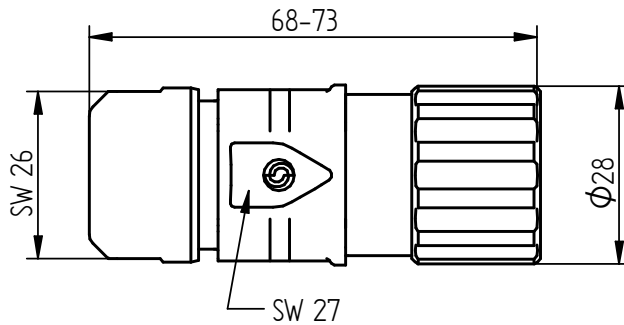

Good chemical resistance



Corrosion-resistant



Industrial machinery and plant engineering



Maximum vibration protection



Mechanical resistance

Creator: MANU2/PDP Released: IVSE1/PDP	Document: DB73000024EN Version: 01	Page 2 of 3
---	---------------------------------------	-------------


We reserve all rights according to DIN ISO 16016.



DATA SHEET	73000024
EPIC® POWER LS1 D6 3+PE+4 K	Valid from: 19.11.2015



Assembly time



Optimum strain relief



Space requirement



Robust



Integrated SKINTOP® cable gland



Waterproof



Wind Energy



Variety of approval certifications

Info

Reduced length for cables which are easy to assemble

Application range

Plant engineering

Servo drives and servo assemblies

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANU2/PDP Released: IVSE1/PDP	Document: DB73000024EN Version: 01	Page 3 of 3
---	---------------------------------------	---------------------------

We reserve all rights according to DIN ISO 16016.