


EPIC® CEE & MULTIMAX Plugs

North American Standard: 30A; International Standard: 32A


EPIC® CEE Straight Plug with Cable Gland (IP67)

Technical Data	
Impact Resistance:	8 J
Ambient Temperature:	-25°C to +50°C
Flame Resistance:	
- Glow wire test:	
- Enclosure:	850°C
- Contact carrier:	850°C
- Self-extinguishing:	
- Enclosure:	V-2 per UL 94
- Contact carrier:	V-2 per UL 94

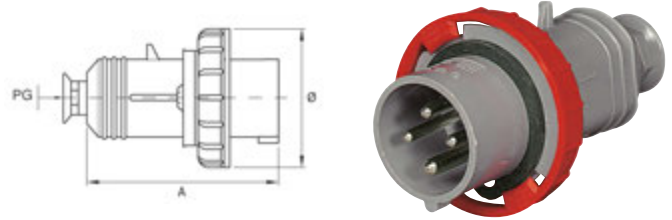


Number of Wires	A		Ø		Cable Entry
	(in)	(mm)	(in)	(mm)	
30/32A					
3	5.55	141	3.70	94	PG 21
4	5.55	141	3.70	94	PG 21
5	5.55	141	3.98	101	PG 21

EPIC® MULTIMAX Plug with Cable Sleeve (IP44)

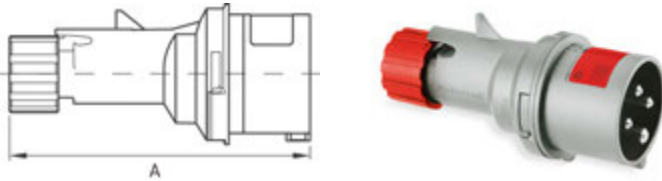

Number of Wires	A	
	(in)	(mm)
30/32A		
3	6.06	154
4	6.06	154
5	6.81	173

EPIC® MULTIMAX Plug with Cable Gland (IP67)

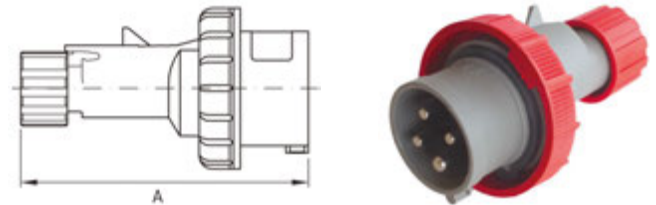

32A International standard only.

Number of Wires	A	
	(in)	(mm)
32A		
3	6.50	165
4	6.50	165
5	6.69	170

EPIC® CEE Inlets

North American Standard: 30A; International Standard: 32A

EPIC® CEE Angled Inlet (IP44)





Number of Wires	A		B		C		D		E		F	
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
30/32A												
3	3.74	95	4.92	125	1.57	40	2.60	66	2.68	68	3.15	80
4	3.74	95	4.92	125	1.57	40	2.60	66	2.68	68	3.15	80
5	4.13	105	5.24	133	1.77	45	2.95	75	3.07	78	3.54	90

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values. For current information go to our website.

EPIC® CEE Inlets

North American Standard: 30A; International Standard: 32A

EPIC® CEE Angled Inlet (IP67)

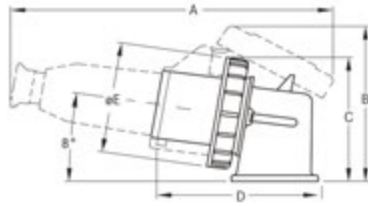


Number of Wires	A		B		C		D		øE		F		G		H		I		øL	
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
30/32A																				
3	9.76	248	5.35	136	4.25	108	4.92	125	3.70	94	2.68	68	3.15	80	1.57	40	2.60	66	1.57	40
4	9.76	248	5.35	136	4.25	108	4.92	125	3.70	94	2.68	68	3.15	80	1.57	40	2.60	66	1.57	40
5	10.04	255	5.83	148	4.72	120	5.24	133	3.98	101	3.07	78	3.54	90	1.77	45	2.95	75	1.77	45

EPIC® CEE & MULTIMAX Connectors


North American Standard: 30A; International Standard: 32A

EPIC® CEE Straight Connector with Cable Gland (IP67)

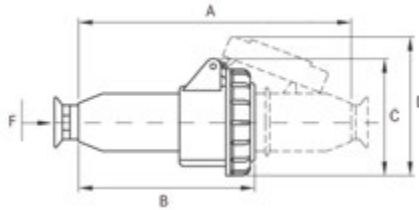


Number of Wires	A		B		C		D		F
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	
30/32A									
3	9.37	238	6.02	153	4.13	105	4.92	125	PG 21
4	9.37	238	6.02	153	4.13	105	4.92	125	PG 21
5	9.37	238	6.02	153	4.33	110	5.12	130	PG 21

EPIC® MULTIMAX Connector with Cable Sleeve (IP44)



Number of Wires	A	
	(in)	(mm)
30/32A		
3	6.42	163
4	6.42	163
5	7.17	182

EPIC® MULTIMAX Connector with Cable Gland (IP67)




Number of Wires	A	
	(in)	(mm)
32A		
3	7.09	180
4	7.09	180
5	7.28	185

32A International standard only.

EPIC® CEE Panel Mount Receptacles


North American Standard: 30A; International Standard: 32A

EPIC® CEE Straight Panel Mount Receptacle (IP44)

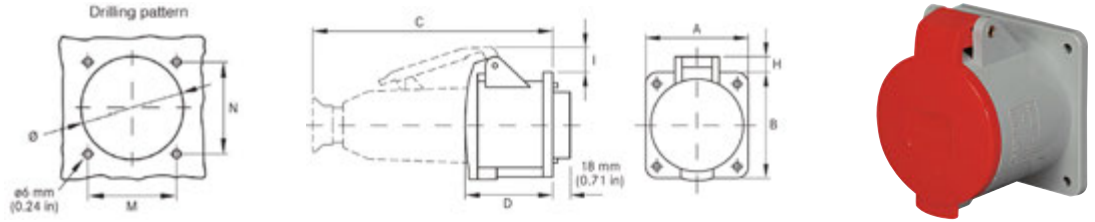

Number of Wires	A		B		C		D		H		I		M		N		Ø	
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
30/32A																		
3	2.95	75	2.95	75	6.69	170	2.44	62	0.47	12	0.79	20	2.36	60	2.36	60	2.49	63
4	2.95	75	2.95	75	6.69	170	2.44	62	0.47	12	0.79	20	2.36	60	2.36	60	2.49	63
5	2.95	75	2.95	75	6.69	170	2.44	62	0.59	15	1.02	26	2.36	60	2.36	60	2.49	63


EPIC® CEE Angled Panel Mount Receptacle (IP67)

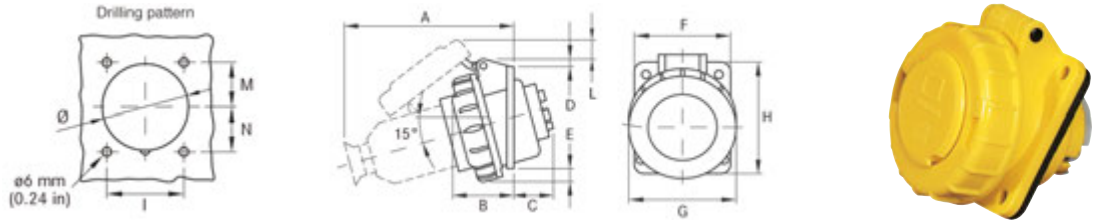

Number of Wires	A		B		C		D		E		F		G		H		L	
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
30/32A																		
3	6.18	157	2.20	56	1.54	39	0.12	3	0.28	7	3.35	85	3.70	94	3.82	97	0.79	20
4	6.18	157	2.20	56	1.54	39	0.12	3	0.24	6	3.35	85	3.70	94	3.82	97	0.79	20
5	6.22	158	2.28	58	1.50	38	0.12	3	0.30	7.5	3.54	90	3.98	101	4.13	105	0.79	20

Number of Wires	I		M		N		Ø	
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
30/32A								
3	2.36	60	1.38	35	1.46	37	2.76	70
4	2.36	60	1.38	35	1.46	37	2.76	70
5	2.56	65	1.50	38	1.65	42	2.95	75

EPIC® CEE Angled Surface Mount Receptacle (IP44)

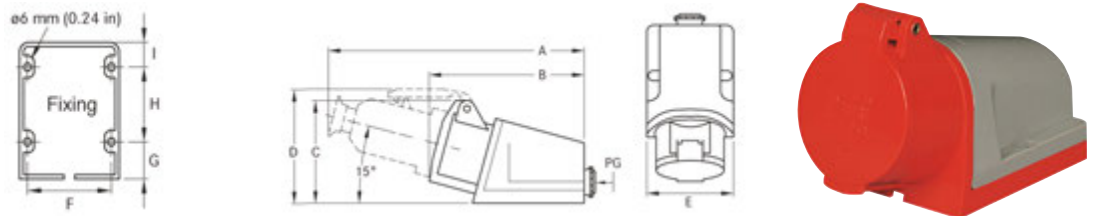


Number of Wires	A		B		C		D		E		F		G		H		I		Cable Entry
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)			
30/32A																			
3	10.08	256	6.06	154	3.94	100	4.53	115	3.31	84	2.83	72	1.24	31.5	2.20	56	0.89	22.5	PG 21
4	10.08	256	6.06	154	3.94	100	4.53	115	3.31	84	2.83	72	1.24	31.5	2.20	56	0.89	22.5	PG 21
5	10.18	258	6.10	155	4.06	103	4.72	120	3.31	84	2.83	72	1.24	31.5	2.20	56	0.89	22.5	PG 21

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values. For current information go to our website.

EPIC® ULYSSE & ALUPRES Switched-Socket Outlets

North American Standard: 30A; International Standard: 32A

EPIC® ULYSSE Thermoset Plastic Enclosure
with Fuse Holder; Mechanical Interlock (IP66/67)

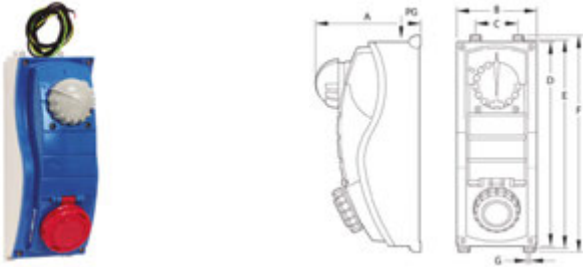

Technical Data


Flame Resistance:

- Glow wire test:
- Enclosure: 960°C
- Contact carrier: 850°C
- Self-extinguishing:
- Enclosure: V-0 per UL 94
- Contact carrier: V-0 per UL 94

Number of Wires	A		B		C		D		E		F		G		Cable Entry*
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	
30/32A															
3	6.50	165	4.92	125	2.60	66	12.60	320	12.87	327	13.39	340	0.20	5	PG 29
4	6.50	165	4.92	125	2.60	66	12.60	320	12.87	327	13.39	340	0.20	5	PG 29
5	6.50	165	4.92	125	2.60	66	12.60	320	12.87	327	13.39	340	0.20	5	PG 29

* Unthreaded, see page 475 for long thread cable glands

EPIC® ALUPRES Aluminum Enclosure
Direct Connect; Mechanical Interlock (IP67)

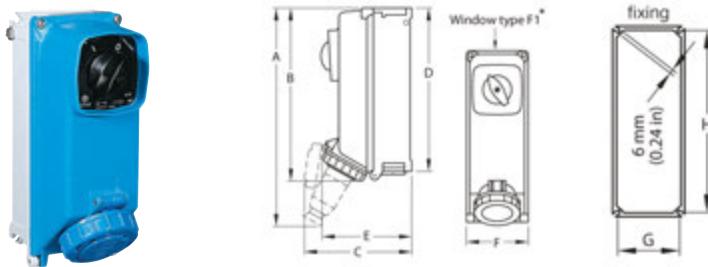

Technical Data

Flame Resistance:

- Glow wire test: 960°C
- Self-extinguishing: V-0 per UL 94

Number of Wires	A		B		C		D		E		F		G		H	
	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
30/32A																
3	16.54	420	13.19	335	8.19	208	12.40	315	6.61	168	4.92	125	4.33	110	11.81	300
4	16.54	420	13.19	335	8.19	208	12.40	315	6.61	168	4.92	125	4.33	110	11.81	300
5	16.54	420	13.29	336	8.28	210	12.40	315	6.69	170	4.92	125	4.33	110	11.81	300

* Order flange and cable gland as required on page 475.