

EPIC® HA 10 Standard & High Profile Hoods

Single Lever Bolts



all dimensions are in mm.

Technical Data				
Specifications:	DIN 43652, DIN 50262 (metric)	IP Protection Class:	NEMA 4, NEMA 12, IP65	
Temperature Range:	-40°C to +125°C	Material:	Powder-coated aluminum alloy	

Size of Entry	PG	NPT	Metric	PG	Part Number	NPT	Metric*	Complete the Installation: SKINTOP® Strain Relief			
								PG Plastic	PG Metal	Metric Plastic	Metric Metal
Standard Profile: Top Entry											
13	1/2"	20		104460	104460NP	19446000		53015030	52015730	53111020	53112020
16	1/2"	25		104461	104461NP	19446100		53015040	52015740	53111030	53112030
Standard Profile: Side Entry											
16	1/2"	20		104450	104450NP	19445000		53015040	52015740	53111020	53112020
21	3/4"	25		104455	104455NP	19445500		53015050	52015750	53111030	53112030
High Profile: Top Entry											
16	1/2"	20		704602	704602NP	79460200		53015040	52015740	53111020	53112020
21	3/4"	25		704604	704604NP	79460400		53015040	52015740	53111020	53112020
High Profile: Side Entry											
16	1/2"	20		704622	704622NP	79462200		53015040	52015740	53111020	53112020
21	3/4"	25		704624	704624NP	79462400		53015050	52015750	53111030	53112030

Approvals




Complete the Installation

HA Dust Covers page 419

* Top entry metric and high profile metric hoods do not come with a neck

EPIC® HA 10 Panel Mount Bases

Single Lever

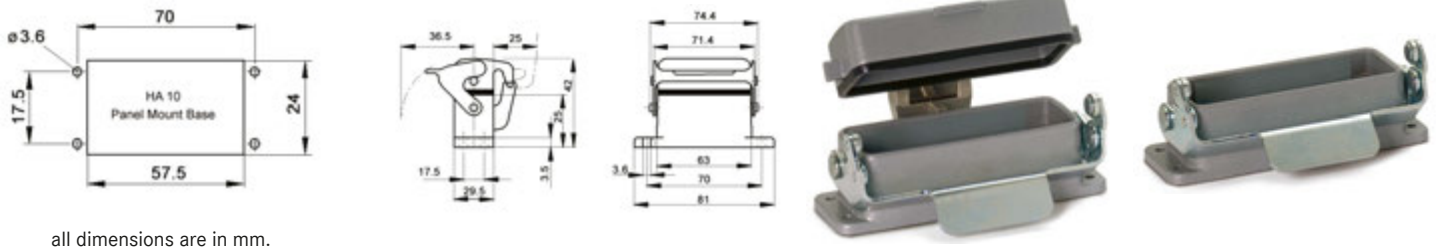

all dimensions are in mm.

Technical Data				
Specifications:	DIN 43652, DIN 50262 (metric)	IP Protection Class:	NEMA 4, NEMA 12, IP65	
Temperature Range:	-40°C to +125°C	Material:	Powder-coated aluminum alloy	

Description	Part Number
Panel Mount Base	104420C0
Panel Mount Base with Dust Cover	704440C0

Approvals



Complete the Installation

HA Dust Covers page 419

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values. For current information go to our website.

EPIC® HA 10 Surface Mount Bases

Single Lever



all dimensions are in mm.

Technical Data


Specifications:	DIN 43652, DIN 50262 (metric)	Protection Class:	NEMA 4, NEMA 12, IP65
Temperature Range:	-40°C to +125°C	Material:	Powder-coated aluminum alloy

PG	Size of Entry		PG	Part Number			Complete the Installation: SKINTOP® Strain Relief			
	NPT	Metric		NPT	Metric	Metric	PG Plastic	PG Metal	Metric Plastic	Metric Metal
2 Entries										
16	1/2"	20	104501	104501NP	19450100	53015040	52015740	53111020	53112020	
21	3/4"	25	104500	104500NP	19450000	53015050	52015750	53111030	53112030	
1 Entry										
16	1/2"	20	104481	104481NP	19448100	53015040	52015740	53111020	53112020	
21	3/4"	25	104480	104480NP	19448000	53015050	52015750	53111030	53112030	
2 Entries with Dust Cover										
16	1/2"	20	704562	704562NP	79456200	53015040	52015740	53111020	53112020	
21	3/4"	25	704564	704564NP	79456400	53015050	52015750	53111030	53112030	
1 Entry with Dust Cover										
16	1/2"	20	704552	704552NP	79455200	53015040	52015740	53111020	53112030	
21	3/4"	25	704554	704554NP	79455400	53015050	52015750	53111030	53112030	

Approvals



Complete the Installation



HA Dust Covers
page 419

EPIC® HA 10 Cable Coupler Hoods

Single Lever



all dimensions are in mm.

Technical Data

Specifications:	DIN 43652, DIN 50262 (metric)	Protection Class:	NEMA 4, NEMA 12, IP65
Temperature Range:	-40°C to +125°C	Material:	Powder-coated aluminum alloy


PG	Size of Entry		PG	Part Number			Complete the Installation: SKINTOP® Strain Relief			
	NPT	Metric		NPT	Metric*	Metric	PG Plastic	PG Metal	Metric Plastic	Metric Metal
Standard Profile										
13	1/2"	20	104390	104390NP	19439000	53015030	52015700	53111020	53112020	
16	1/2"	25	704500	704500NP	79450000	53015040	52015740	53111030	53112030	
High Profile										
21	3/4"	25	704504	704504NP	79450400	53015050	52015750	53111030	53112030	

* Metric hoods do not come with a neck

Approvals



Complete the Installation



HA Dust Covers
page 419