


EPIC® MC 10 Modules

Crimp-Terminated: Stamped & Formed Contacts



Contacts sold separately, see below

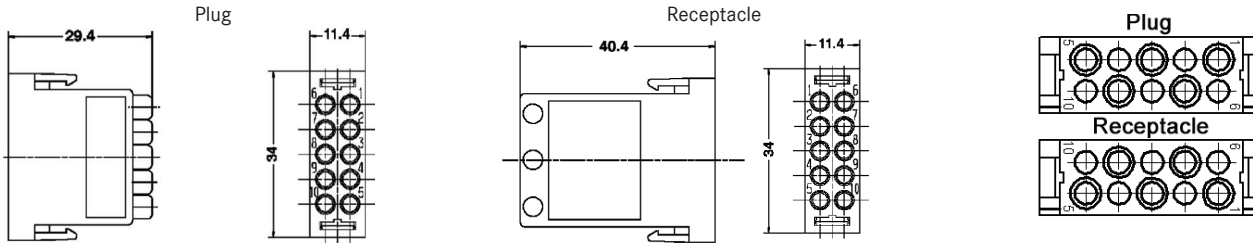

All dimensions are in mm.

Approvals




Technical Data

Temperature Range:	-40°C to +100°C
Rated Voltage:	250V
Rated Current:	10A

Description	Plug	Receptacle
Crimp-Terminated: Stamped & Formed Contacts	10383400	10383500

Stamped & Formed Contacts

1.6 mm Diameter



1 part number = 1 contact, sold in bags of 100 or 1 reel

Contact Size		Stripping Length (mm)	Silver Contacts		Gold Contacts		Reel of 100: Silver Left-hand Feed		Reel of 200: Silver Left-hand Feed	
mm ²	AWG		Pin	Socket	Pin	Socket	Pin	Socket	Pin	Socket
0.14-0.5	26-20	2.5-0.5	11241100	11231100	11243100	11233100	—	—	11240700	11230700
0.5-1.5	20-16	3.5-0.5	11221000	11236100	11221300	11238100	—	—	11220700	11235700
1.5-2.5	16-14	3.5-0.5	11223500	11228500	—	—	11223000	11228000	—	—

Contact Size		Stripping Length (mm)	Reel of 2000: Silver Right-hand Feed		Reel of 2000: Gold Right-hand Feed		Reel of 2000: Silver Left-hand Feed		Reel of 2000: Silver Left-hand Feed	
mm ²	AWG		Pin	Socket	Pin	Socket	Pin	Socket	Pin	Socket
0.14-0.5	26-20	2.5-0.5	11240000	11230000	—	—	11240400	11230400	11230500	11240500
0.5-1.5	20-16	3.5-0.5	11220000	11235000	11220100	11235200	11226000	11226500	—	—
1.5-2.5	16-14	3.5-0.5	—	—	—	—	11222700	11227700	—	—



Complete the Installation

	Crimp Tool: 11147000		Locator: 11147300		Crimp Dies: 0.14-0.5 mm ² : 11147170 0.5-1.5 mm ² : 11147180 1.5-2.5 mm ² : 11147190		Crimp Tool for Reel: (includes tool, die, & locator) 0.14-0.5 mm ² : 11147004 0.5-1.5 mm ² : 11147005 1.5-2.5 mm ² : 11147006
			Removal Tool: 11161000				

Photographs are not to scale and are not true representations of the products in question. For current information go to our website. If not otherwise specified, all values relating to the product are nominal values.