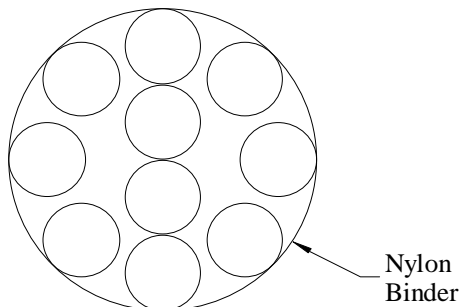


**Description:** Ten 18 AWG Singles, Hoistway Cable  
 Unshielded/Unjacketed

**Date:** 4/25/2006  
**JM Part Number:** JMC-HC1018  
**Alt Part Number:** TBD

**Cable Diagram**

**Components**

Ten 18 AWG Singles

 Conductor: 18 AWG, 16/30 bare copper  
 Insulation: .030" nominal wall of PVC (see color code) .105"

**Overall Cable Construction**

 Cabling: Ten Conductors twisted together with no fillers  
 Binder: Nylon with an open spiral wrap .420"

**Print**

Each conductor will be printed as follows:

**JAMES MONROE W&C E96512 (UL) & LL41103 (CSA) FT1 HOISTWAY CABLE 18 AWG 600V**
**Color Code**

 Example of numerical print: **1-ONE**

1 - 10: Yel w/numerical print "1" - "10"

**Requirements**

 Temperature: 60C  
 Voltage: 600V

 Approvals: UL Hoistway  
 NEC Compliant

CSA Hoistway

Written By:	rjc	4/25/2006	Rev. 0	Initial Issue
Revised By:				
Revised By:				
Revised By:				