


DRAWING CREATED FROM ELECTRONIC FILE:

THIS DOCUMENT IS THE SOLE PROPERTY OF EXPONENT INC. THE INFORMATION IT CONTAINS MAY NOT BE REPRODUCED OR COMMUNICATED TO ANY UNAUTHORIZED ORGANIZATION OR INDIVIDUAL WITHOUT PERMISSION IN WRITING FROM EXPONENT INC.

REV

REVISIONS
DESCRIPTION


DATE APPROVED

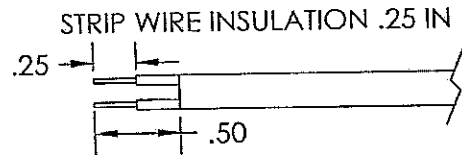

CANNON (MALE)
0733 KPT06F12-3P

STRIP CABLE INSULATION .25 IN


CANNON (FEMALE)
0733 KPT06F12-3S

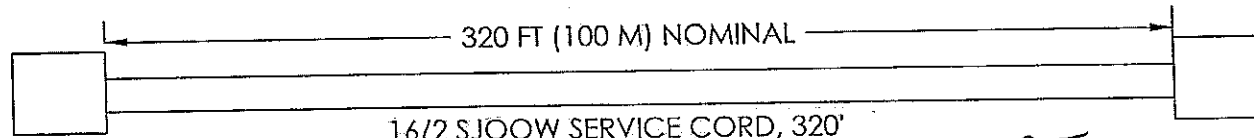


JWC # 577185

PINOUT:

- A) BLACK : 24 VAC HOT
- B) WHITE: 24 VAC NEUTRAL
- C) NOT USED



SOLDERCUP VIEW
(REAR CONNECTOR VIEW)



SOLDERCUP VIEW
(REAR CONNECTOR VIEW)

NOTES:

- 1) SHORT WIRE ON SPOOL GETS MALE CANNON 0733 KPT06F12-3P
- 2) USE BLUE LOCTITE ON ALL CONNECTOR SCREWS
- 3) DRAWING NOT TO SCALE

DO NOT SCALE DRAWING

GD&T PER ASME Y14.5M-1994

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN: INCHES

TOLERANCES

DECIMAL:

.X ± 0.1

.XX ± 0.01

.XXX ± 0.005

ANG. ± 1°

MATERIAL:

FINISH:

TREATMENT:

PROJECT/CONTRACT NUMBER:

APPROVALS

DWN C. MOORE

CHK

ENG

MFG

QA

THIRD ANGLE
PROJECTION

DATE

09/13/07

Exponent

23445 North 19th Avenue

Phoenix, AZ 85027

Ph. (623) 582-6949 Fax (623) 587-4187

TITLE:

RDISS 3.0 VIDEO NODE TO PTZ SERVER POWER CABLE

SIZE DRAWING NO.

A

EXP-0388-REV01

SCALE: 1:1 CAGE CODE:

SHEET 1 OF 1