


REV.	DESCRIPTION	DATE
0	Initial Release.	04/03/2006
1	Removed shield on signal conductor.	04/05/2006
2	Revised cable dimensions.	05/09/2006
3	Add Jacket bond Requirements	09/20/2007
4	Add Black Band to Siamese component	02/05/2009

General Properties:

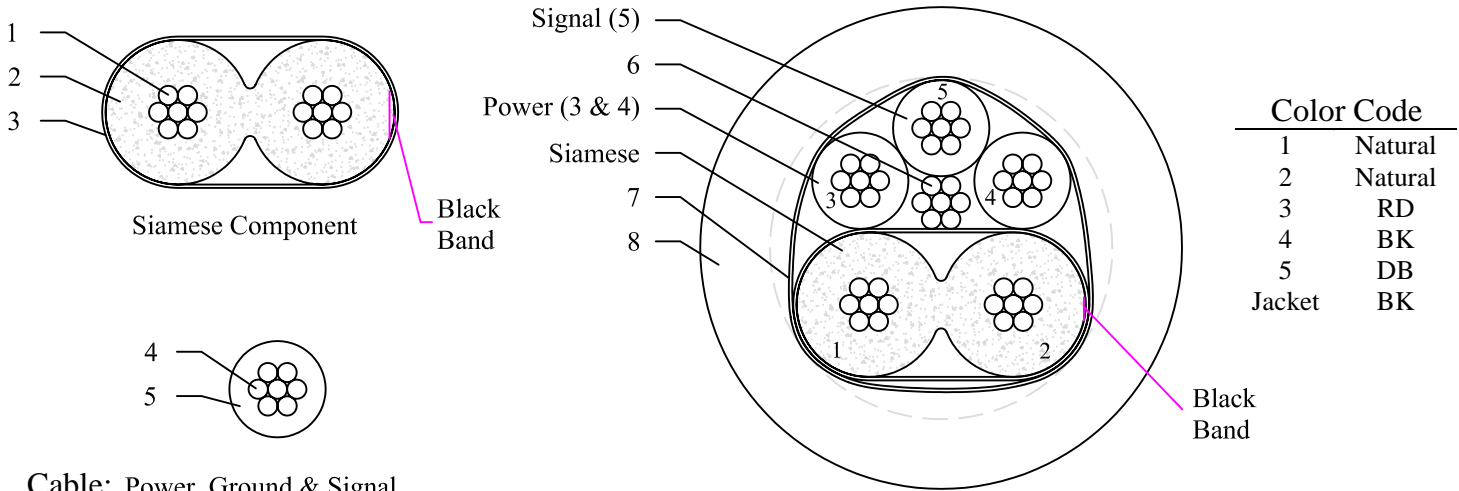


Cable: Power, Ground & Signal

Primaries 1 & 2 (Siamese):	Description	Dimensions
1. Conductor:	22 AWG 7/30 Copper, (1) bare copper (1) tin plated copper	0.030" ± .001" [0.76mm]
2. Insulation:	Exrad-Cell (reference 25 mil [0.64mm] wall)	0.150" x 0.080" nominal
Extrusion:	(2) Conductors extruded with Siamese profile	[3.80mm x 2.03mm]
3. Shield:	Tinned Copper side of Siamese component marked with Black Band	
Primaries 3, 4 & 5 (Power, Ground + Signal):		
4. Conductor:	22 AWG 7/30 Bare Copper	0.030" ± .001" [0.76mm]
5. Insulation:	Exrad 150UT Solid, 10 mil [.25mm] wall nominal	0.050" ± .002" [1.27mm]
Overall Cable:	Siamese foamed pair, (2) solid singles, (1) shielded single and drain wire pulled in as drawing shows and twisted	
	Lay Length: 5" to 6"	
6. Drain:	22 AWG 7/30 Bare Copper	0.030" ± .001" [0.76mm]
7. Shield:	1.5 mil Aluminum/Mylar, Shield 20% min. overlap	0.177" ± .005" [4.51mm]
	Exrad 150FX, Wall run to OD (reference 36 mil [0.92mm] wall)	0.230" ± .005" [6.35mm]
8. Jacket:	Pressure extruded for roundness, OD is measured 10 points around circumference then averaged.	
	Bond: 6lbs max, measured with 1.5" slug pulled at 20"/min	

Technical Details (*Foamed Siamese Pair Only):

Voltage Rating:	300 V (all conductors)
Temperature Rating:	-40 °C to 125 °C
Impedance:	Single Ended *75 +/- 5 Ohms - conductor to conductor
	Differential *95 Ohms +/- 10% - conductor to conductor (drain grounded) @ 1 MHz

 <p>175 HERCULES DRIVE COLCHESTER, VT 05446 802-654-4200</p>	TITLE		CAMERA CABLE		
			22 AWG Siamese Signal + Power, Ground & Signal		
	UNLESS OTHERWISE SPECIFIED, DIMENSIONS AND TOLERANCES ARE IN INCHES DO NOT SCALE THIS DRAWING		DRN.	DATE	
			Scott Hood	04/03/2006	
		CKD.	DATE		
		SIZE	PART NUMBER	DOCUMENT NUMBER	
		A	15-07536-001	12916	
The information on this drawing is the proprietary property of Champlain Cable Corporation, and may not be used, reproduced or disclosed to others, in whole or in part, without written authorization.				PAGE 1 of 1	