


EXTENDO®

EXPANDABLE SLEEVING

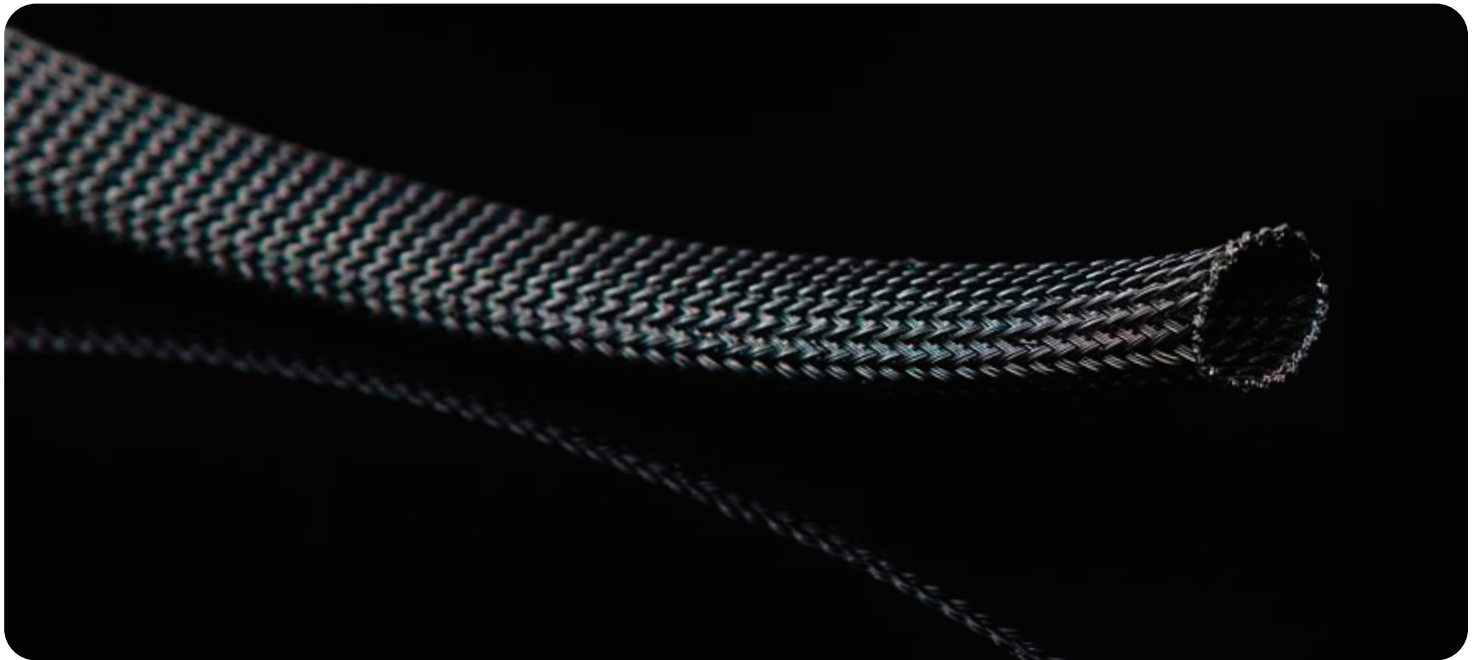

Revision Date: 1/26/2016

Extendo® N66

Product Highlights

- Operating Temperature
-45°C to 150°C
- Self-Extinguishing
- Abrasion Resistant
- Halogen Free
- Excellent Cut-Through
Protection

Atkins & Pearce's Extendo® N66 is an extremely tough expandable sleeving with a polyamide 6,6 monofilament construction. It is uniquely resistant to Gasoline and automotive chemicals. In addition, this sleeving is highly flexible and capable of protecting a wide range of varying diameters.

Extendo® N66 sleeve is rated to 150° C and is known for its resistance to various solvent based fluids. Typical applications are protection for hoses, tubings and wire harnesses. Also available in a XL construction.

For more information or to discuss the use of Extendo® N66 in your specific application, please contact our technical sales department by phone or email.

Atkins & Pearce

One Braid Way
Covington, KY 41017
U.S.A.

P: 859.356.2001
W: www.atkinsandpearce.com
E: info@atkinsandpearce.com

Extend[®] N66

PROPERTY	TEST	RESULT/VALUE
Flammability	FMVSS 302	Self Extinguishing, Type B
	SAE J 369-89	Pass
Fluid Resistance	SAE J2 192	100% Tensile Retention
	MIL-I-23053	100% Tensile Retention
Thermal Overload	ES-AC35-IA303-AA	Pass
Low Temp Flexibility	MIL-DTL-23053E	-70°C
Heat Age @ 168 Hrs	ES-AC35-IA303-AA	Pass
Heat Age @ 3,000 Hrs		Pass
Abrasion	SAE ARP 1536A	Min. 45,000 cycles

Dimensions/Specifications			
Nominal ID		Recommended Diameter Range (mm)	
Imperial	Metric	Min.	Max.
1/8"	4mm	4	7
1/4"	6mm	6	9
5/16"	8mm	8	12
3/8"	10mm	10	15
1/2"	12mm	12	18
9/16"	15mm	15	23
3/4"	20mm	20	28
1"	25mm	25	35
1 1/4"	30mm	30	45
1 1/2"	38mm	38	57
1 5/8"	40mm	40	60
2"	50mm	50	75

*Cut lengths available upon request.



One Braid Way
Covington, KY 41017
U.S.A.
P: 859.356.2001

W: www.atkinsandpearce.com
E: info@atkinsandpearce.com

*Companies should use this information only as a supplement to other information gathered by them, and should make independent judgment of the suitability of this information, and to ensure proper use for the health and safety of their customers and/or employees. This information is believed to be reliable, but is furnished without warranty, and we assume no liability resulting from its use.