


EXTENDO®

EXPANDABLE SLEEVING

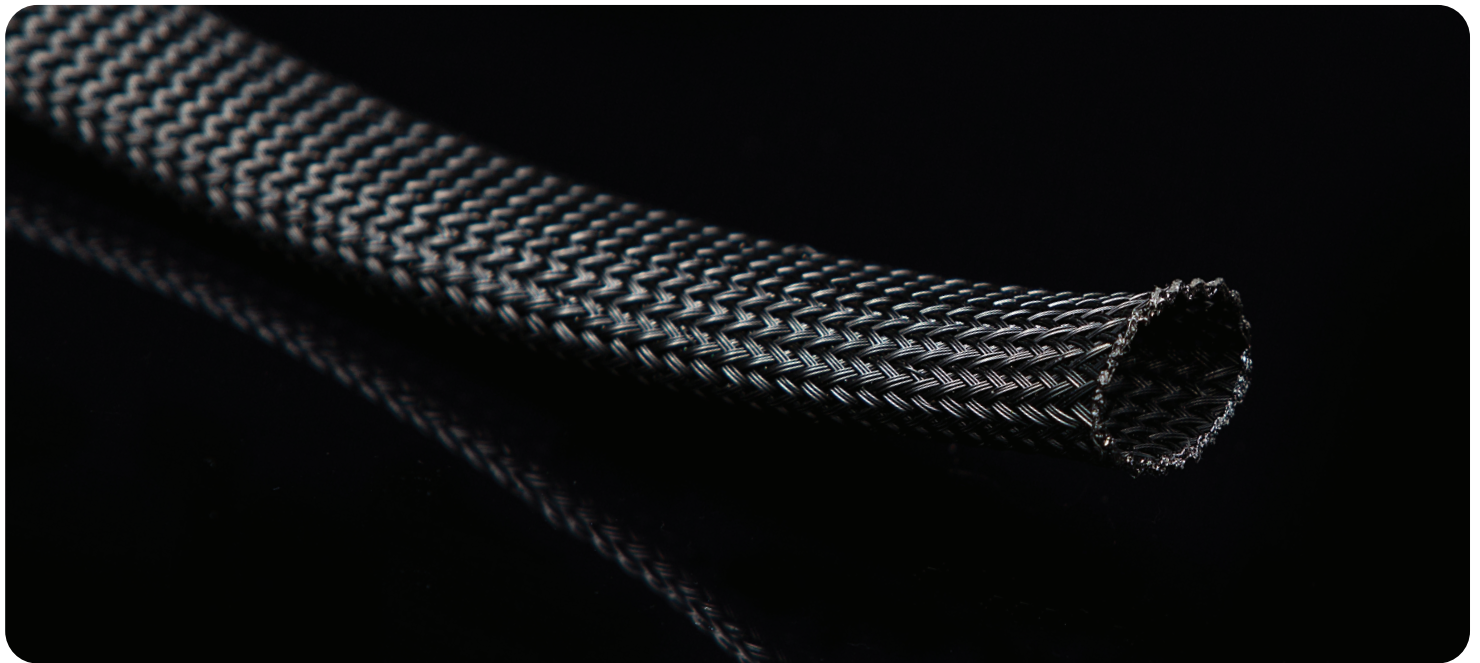

Revision Date: 1/22/2016

Extendo® PET L / N

Product Highlights

- Working Temperature
-50°C to 125°C
- Low Temperature
Flexibility to -70°C
- RoHS Compliant
- Halogen Free
- Outstanding Abrasion
Protection

Atkins & Pearce's Extendo® PET L/N is a light weight expandable sleeving produced from polyethylene terephthalate (PET) monofilaments (.0009") and Nylon Guard Strands (.012"). The special blending of the monofilaments in Extendo® PET L/N provides the perfect balance of toughness, flexibility and abrasion protection.

Extendo® PET L/N sleeve is rated to 125° C and is available in Black. Its superior flexibility supports the recommended use of hose and cable assembly protection.

For more information or to discuss the use of Extendo® PET L/N in your specific application, please contact our technical sales department by phone or email.

Atkins & Pearce

One Braid Way
Covington, KY 41017
U.S.A.

P: 859.356.2001
W: www.atkinsandpearce.com
E: info@atkinsandpearce.com

Extendo[®] PET L / N

Dimensions/Specifications

Nominal ID	
Imperial	Metric
1/4"	6mm
5/16"	8mm
3/8"	10mm
1/2"	13mm
3/4"	19mm
1"	25mm
1 1/4"	32mm
1 1/2"	38mm
2"	51mm

*Cut lengths available upon request.

Atkins&Pearce

One Braid Way
Covington, KY 41017

U.S.A.

P: 859.356.2001

W: www.atkinsandpearce.com

E: info@atkinsandpearce.com

*Companies should use this information only as a supplement to other information gathered by them, and should make independent judgment of the suitability of this information, and to ensure proper use for the health and safety of their customers and/or employees. This information is believed to be reliable, but is furnished without warranty, and we assume no liability resulting from its use.