High Quality Fans

Featuring smooth, ball-bearing design, the 120V mount flush and come in 4-1/2", 6" and 10" models. QFAN quiet fan includes guard with a black powder coat finish and is great for minimizing noise. AXS-FAN features a slim design for mounting in AXS Series racks. BMF-FAN10 provides 825 CFM of cooling for enclosures with a high heat density. Mounting hardware and cord included with each unit.

FAN-10

FAN-6

complete with black powder coat finish guard

QFAN **GUARD**

GUARD-6

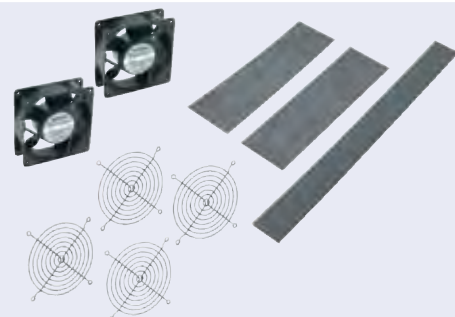| 120V Part #**	Size	Depth	Free Air dB Rating	Free Air CFM
FAN	4-1/2"	1-1/2"	39 dBA	95
QFAN	4-1/2"	1-1/2"	<30 dBA	50
AXS-FAN	4-1/2"	1"	30 dBA	57
FAN-6	6"	1-1/2"	49 dBA	220
FAN-10	10"	3-1/2"	49 dBA	550
BMF-FAN10	10"	4-1/4"	60 dBA	825
**international versions available				

Fan Guards

Fitting 4-1/2", 6" and 10" fans, fan guards are "Hamburger grille" style & have a black powder coat finish, includes hardware.

Part #	Fits
GUARD	4-1/2" fan
GUARD-6	6" fan
GUARD-10	10" fan

GUARD-10

Fan Kits

Fan kits include (2) 4-1/2" fans, (4) guards, and the necessary vent blockers to optimize the airflow.

120V Part #**	Size	Depth	Free Air dB Rating	Free Air CFM
AXS-FAN-K*	4-1/2"	1"	33 dBA	114
5-FAN-K*	4-1/2"	1"	33 dBA	114
*includes 2 fans **international versions available				

Part #	Fits
DWR-FK17	DWRxx17
DWR-FK22	DWRxx22/SRxx22
DWR-FK26	DWRxx26
DWR-FK32	DWRxx32/SRxx32

BGR and EGR options are shown on rack series pgs.

Fan Kit with Intelligent Thermostatic Control
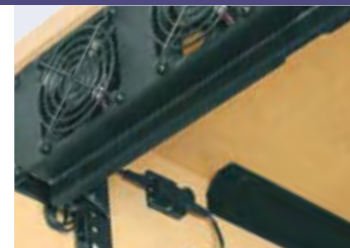
NEW!

Intelligent cooling for laminate racks.
- Intelligent thermostatic control
- Mounts in top of rear access panel
- Fits RK/BRK and RDR Series
- 100 CFM

DCFANKIT-4

power supply with remote temperature sensor

120V Part #**	Description
DCFANKIT-4	fan kit 4 fans 100 CFM, 120V adapter and controller included
**international versions available	

Fan Tray System

NEW!

RoHS **EIA/TIA Compliant**

Fan tray system lets you locate fans directly above vents on hot equipment to help hot air get moving in the right direction for rack cooling systems.
- Uses from 3 to 8 quiet 4" DC fans (69 CFM for each fan)
- 8 fan mounting positions and optional add-on fans let you locate fans exactly where needed
- Energy-saving thermostatic control for automatic on/off as needed
- Powered by a single power cord
- Occupies only one rackspace
- Adjustable mounting range of 18" to 32"

18" - 32" range

FTA-3

FTA-6

fans can be positioned where they are most needed

Part #	Description	Free Air CFM
FTA-3	3 fan tray	207
FTA-6	6 fan tray	414
FT-FAN	add-on 4" DC fan	69

ideal for use with VRS vented rackmount shelf, see pg. 153