

# 14 AWG 4-conductor Festoon Cable, Yellow



RG Wire & Cable Ltd  
67 Cavendish Way  
Glenrothes KY6 2SB  
Scotland  
Tel: +44 1592 775800  
[www.rgcable.com](http://www.rgcable.com)

**Part NO:** RGW-FC0414Y  
**Product Code:** RGW-FC14

**Product Description**

**Application:**  
Cranes, hoists, robots, conveyors, and festooning systems

**Reference Standards Fulfilled**  
UL listed/CSA certified flat festoon cable

**Cable Construction**

**Conductor** **Bare Copper**  
Construction (in.) 41/0.010 (+/- 0.001)  
Standard Dia.(in.) 0.074 (+/- 0.003)  
**Insulation** **PVC**  
Average Thickness (in.) 0.030 nom.  
Insulation Dia.(in) 0.138 (+/- 0.005)

**Jacket** **PVC**  
Thickness(in.) .035 (+/- 0.003)  
Dia, Minor x Major (in.) 0.215 x 0.630 (nom.)  
Jacket Color Yellow

**Color**  
**Insulation colors are:**  
Black, Red, Blue, Orange

**Marking (Twice Per Meter)**  
RG Cable (UL) E482108 Festoon Cable 600V Outdoor VW-1 105C  
Dry 75C Wet 14AWGx4C CSA LL113746 Festoon Cable 600V  
105C Sun Res FT1 (-40C)


**PACKAGING**  
Wooden Drum  
Rated Temperature(°C) -40 to 105C

RoHS GUIDELINE			
We operate according to the following standards			
Control Item	Standard	Testing Method	Testing Equipment
Cadmium content (Cd)	<0.01%	EN1122	ICP-AES
Lead content (Pb)	<0.1%	EPA3050B	ICP-AES
Mercury content (Hg)	<0.1%	EPA3052	ICP-AES
Chromium (VI) content	<0.1%	EPA3060(UN-VIS)	ICP-AES
Polybrominated Biphenyls(PBB)	Forbidden	GC/MS	
Polybrominated Diphenyl Ether (PBDE)	Forbidden	GC/MC	

**Revision History**

Updated Spec

**Design**

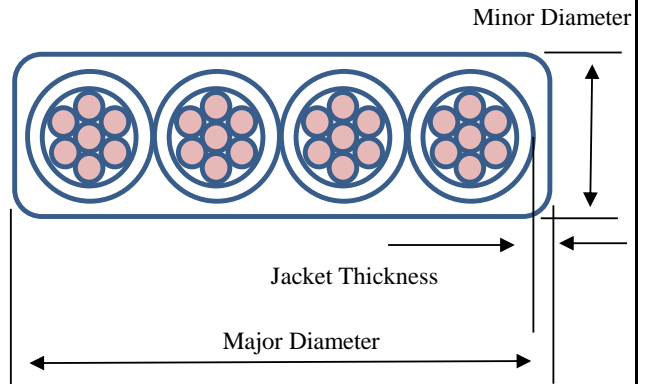

Drawn by: MJH

Date: Aug 4, 2016

Page: 1 of 1

