


# GeneralCable

## TWELVE CONDUCTOR #16AWG SHIELDED FESTOON CABLE

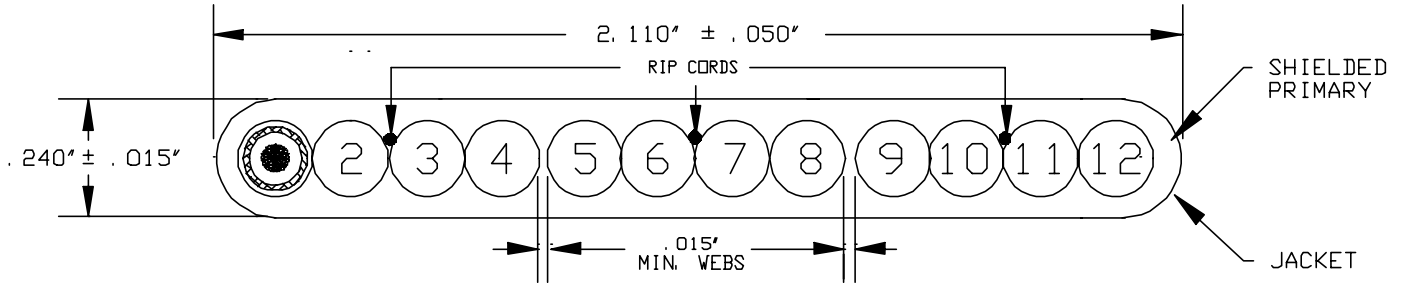

SHIELDED PRIMARY

CONDUCTOR: #16AWG 65/34 BARE COPPER  
 INSULATION: PVC- .031" NOMINAL WALL  
 DIAMETER: .122" NOMINAL  
 SHIELD: #36AWG TINNED COPPER BRAID-90% MIN. COVERAGE  
 JACKET: PVC (BLACK)-.011" NOMINAL WALL  
 DIAMETER: .166" NOMINAL

CABLE

TWELVE (12) OF THE ABOVE PRIMARIES & RIP CORDS PULLED IN

JACKET

PVC- (BLACK)-.038" NOMINAL WALL

DIAMETER

.240" X 2.110" NOMINAL

REQUIREMENTS

TEMPERATURE/VOLTAGE RATING: 105°C 600V  
 NET CABLE WEIGHT: 456 LBS/1000'  
 LISTINGS: UL FESTOON CABLE

COLOR CODE

ITEM NO.	COLOR	ITEM NO.	COLOR
1	BLACK	5	YELLOW
2	RED	6	BROWN
3	BLUE	7	RED/BLACK
4	ORANGE	8	BLUE/BLACK

JACKET PRINT

"E-24573 PVC T-11998(12/16) 105C 600V (UL) SHIELDED  
 FESTOON CABLE 12/C 16AWG OUTDOOR USE VW-1/FT1"

REVISIONS

O	06/18/99	FIRST ISSUE
A	08/27/04	UPDATE

**GeneralCable**  
 1600 West Main Street, Willimantic, CT 06226-1128  
The Power of One

DRAWING NO: 12-986

REFERENCES

IEWC  
 GeneralCableP/N 435410 T-11998(12/16)

DRAWN BY: W. DRABEK      APPROVED BY: M. LAJEUNESSE

THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable