

**MERCURY WIRE PRODUCTS, INC.**  
**SPENCER, MASSACHUSETTS**  
*Manufacturers of Wire & Cable*

# CABLE SPECIFICATION

MW#: 22221  
 ENGINEERED BY: DH  
 DATE: 5/4/2007  
 SHEET 1 OF 1  
 REVISION: 01

## 14/C #20 AWG RIBBON CABLE

**Conductors:** #20 AWG 19/32 tinned copper

**Insulation:** nominal .015" thickness, -27 to 105°C PVC


- Color Code:**
1. Brown
  2. Red
  3. Orange
  4. Yellow
  5. Green
  6. Blue
  7. Violet
  8. Gray
  9. White
  10. Black
  11. White/Brown
  12. White/Red
  13. White/Orange
  14. White/Yellow

**Cable Construction:** (14) #20 AWG conductors are bonded together, parallel

**Approximate Dimensions:** .070" Minor x .980" Major

This product is compliant with Directive 2002/95/EU (RoHS) based on information provided to Mercury Wire Products, Inc. by our raw material vendors.

Cross Section

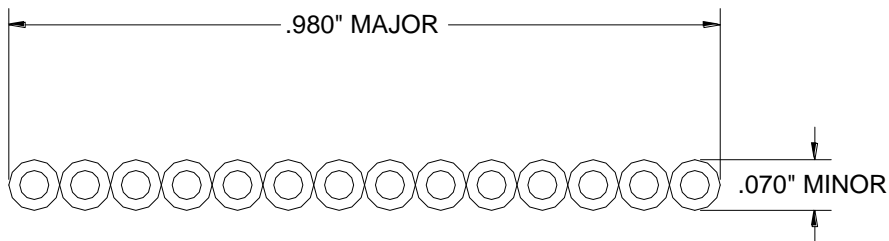

**PACKAGING:** BULK PUT-UPS, LONGEST LENGTHS POSSIBLE, 3 LENGTHS PER REEL MAXIMUM UNLESS OTHERWISE SPECIFIED ON PURCHASE ORDER. DIFFERENT PACKAGING MAY INCUR ADDITIONAL COSTS.

THE PHYSICAL AND ELECTRICAL CHARACTERISTICS CONTAINED IN THIS CABLE SPECIFICATION ARE BELIEVED TO BE RELIABLE AND ARE DERIVED FROM VENDOR SUPPLIED DATA AND INDUSTRY STANDARDS. AS EACH APPLICATION IS UNIQUE, MERCURY WIRE CAN MAKE NO WARRANTIES AS TO THE SUITABILITY OF ANY PRODUCT FOR A PARTICULAR USE.

ACCEPTED: \_\_\_\_\_  
 COMPANY NAME

\_\_\_\_\_  
 NAME (PRINTED)

\_\_\_\_\_  
 DATE

\_\_\_\_\_  
 NAME (SIGNATURE)