


3M™ Round Conductor Flat Cable

.100" 22 AWG Stranded, PVC

8124 Series

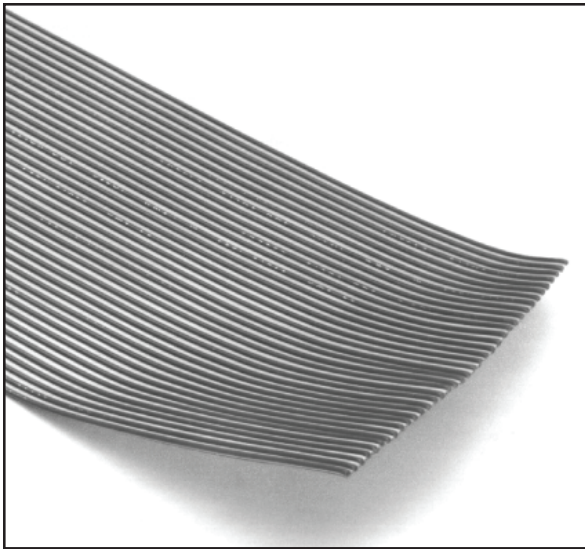

- Designed for power applications requiring higher current carrying capability
- 22 AWG tinned stranded copper wire provides flexibility and extended product life
- Individually insulated conductors are laminated to a PVC backing which can be zipped apart for branching or discrete terminations
- See Regulatory Information Appendix (RIA) for chemical compliance information (RIA E1 & C1 apply)

Date Modified: May 15, 2009

TS-0084-B
Sheet 1 of 2

Physical

Insulation:

Material: Polyvinyl Chloride (PVC)

Color: Dark Gray Wires on Light Gray Carrier

Marking:

Standard: None

Canadian Option:  AWM 20462 105C 300V VW1 3M NU C  AWM IA 80C 150V FT1 EU <50V

Conductors: 22 AWG 7 × 30 [7 × 0.254] Tinned Stranded Copper

Electrical

Voltage Rating: USA: 300V Canada: 150V EU: <50V

Insulation Resistance: $> 1 \times 10^{10} \Omega/10 \text{ ft. [3 m]}$

Characteristic Impedance: Unbalanced: 119 Ω

Capacitance: Unbalanced: 11.0 pF/ft [36.1 pF/m]

Inductance: Unbalanced: 0.15 $\mu\text{H/ft [0.49 } \mu\text{H/m]}$

Propagation Delay: Unbalanced: 1.30 ns/ft [4.27 ns/m]

Velocity of Propagation: Unbalanced: 78%

Note: Unbalanced is measured between ground-signal-ground conductors.

Environmental

Temperature Rating: -20°C to +105°C Canada: -20°C to +80°C

Flammability Rating: USA: VW-1 Canada: FT1

UL File No.: E42769, Style No: 20462

3M
Interconnect Solutions
<http://www.3M.com/interconnects/>

3M is a trademark of 3M Company.
For technical, sales or ordering information call
800-225-5373


3M™ Round Conductor Flat Cable

.100" 22 AWG Stranded, PVC

8124 Series



Number of Conductors	3M Part Number	Dimension A	Dimension B
05	8124/05	0.468 ± .015 [11.89]	0.400 ± .010 [10.16]
06	8124/06	0.568 ± .015 [14.43]	0.500 ± .010 [12.70]
07	8124/07	0.668 ± .015 [16.97]	0.600 ± .010 [15.24]
08	8124/08	0.768 ± .015 [19.51]	0.700 ± .010 [17.78]
09	8124/09	0.868 ± .015 [22.05]	0.800 ± .010 [20.32]
10	8124/10	0.968 ± .015 [24.59]	0.900 ± .010 [22.86]
11	8124/11	1.068 ± .020 [27.13]	1.000 ± .015 [25.40]
12	8124/12	1.168 ± .020 [29.67]	1.100 ± .015 [27.94]
13	8124/13	1.268 ± .020 [32.21]	1.200 ± .015 [30.48]
14	8124/14	1.368 ± .020 [34.75]	1.300 ± .015 [33.02]
15	8124/15	1.468 ± .020 [37.29]	1.400 ± .015 [35.56]
16	8124/16	1.568 ± .020 [39.83]	1.500 ± .015 [38.10]
17	8124/17	1.668 ± .020 [42.37]	1.600 ± .015 [40.64]
18	8124/18	1.768 ± .020 [44.91]	1.700 ± .015 [43.18]
19	8124/19	1.868 ± .020 [47.45]	1.800 ± .015 [45.72]
20	8124/20	1.968 ± .020 [49.99]	1.900 ± .015 [48.26]
21	8124/21	2.068 ± .025 [52.53]	2.000 ± .020 [50.80]
22	8124/21	2.168 ± .025 [55.07]	2.100 ± .020 [53.34]
23	8124/23	2.268 ± .025 [57.61]	2.200 ± .020 [55.88]
24	8124/24	2.368 ± .025 [60.15]	2.300 ± .020 [58.42]
25	8124/25	2.468 ± .025 [62.69]	2.400 ± .020 [60.96]
26	8124/26	2.568 ± .025 [65.23]	2.500 ± .020 [63.50]
27	8124/27	2.668 ± .025 [67.77]	2.600 ± .020 [66.04]
28	8124/28	2.768 ± .025 [70.31]	2.700 ± .020 [68.58]
29	8124/29	2.868 ± .025 [72.85]	2.800 ± .020 [71.12]
30	8124/30	2.968 ± .025 [75.39]	2.900 ± .020 [73.66]
31	8124/31	3.068 ± .025 [77.93]	3.000 ± .020 [76.20]
32	8124/32	3.168 ± .025 [80.47]	3.100 ± .020 [78.74]
33	8124/33	3.268 ± .025 [83.01]	3.200 ± .020 [81.28]
34	8124/34	3.368 ± .025 [85.55]	3.300 ± .020 [83.82]
35	8124/35	3.468 ± .025 [88.09]	3.400 ± .020 [86.36]
36	8124/36	3.568 ± .025 [90.63]	3.500 ± .020 [88.90]
37	8124/37	3.668 ± .025 [93.17]	3.600 ± .020 [91.44]
38	8124/38	3.768 ± .025 [95.71]	3.700 ± .020 [93.98]
39	8124/39	3.868 ± .025 [98.25]	3.800 ± .020 [96.52]
40	8124/40	3.968 ± .025 [100.79]	3.900 ± .020 [99.06]

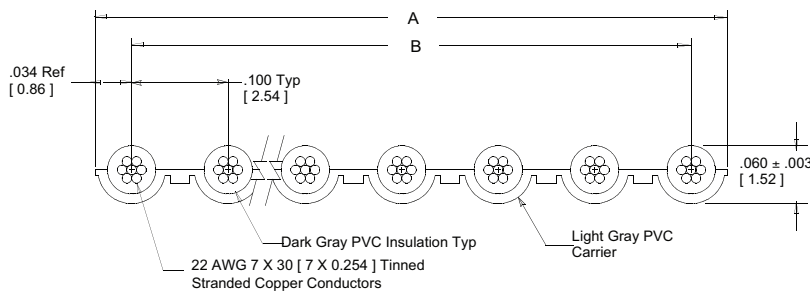


Tolerance Unless Noted			
	Inch [mm]		
	.0	.00	.000
Inch	±.1	±.01	±.005

[] Dimensions for Reference Only

Note: Red marking on one edge of cable designates wire #1.

Ordering Information

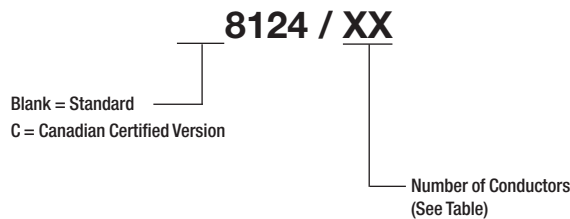

Note: Standard length is 100 ft/roll.

TS-0084-B
Sheet 2 of 2

Regulatory Information Appendix

3M Electronic Solutions Division/Interconnect

EUROPE

Appendix E1: European Union RoHS

Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical & Electronic Equipment, as amended by EU Commission Decision 2005/618/EC.

This product is RoHS Compliant 2005/95/EC.

“RoHS Compliant 2005/95/EC” means that the product or part (“Product”) does not contain any of the substances in excess of the maximum concentration values in EU Directive 2002/95/EC, as amended by Commission Decision 2005/618/EC, unless the substance is in an application that is exempt under EU RoHS. Unless otherwise stated by 3M in writing, this information represents 3M’s best knowledge and belief based upon information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M’s Regulatory Information Appendix, then 3M’s entire liability and Buyer’s exclusive remedy will be in accordance with the Warranty stated below.

Appendix E2: European Union RoHS

Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical & Electronic Equipment, as amended by EU Commission Decision 2005/618/EC.

This product contains lead in the compliant pin area in excess of the maximum concentration value allowed but is compliant by exemption under EU Commission Decision 2005/747/EC.

“RoHS Compliant 2005/95/EC” means that the product or part (“Product”) does not contain any of the substances in excess of the maximum concentration values in EU Directive 2002/95/EC, as amended by Commission Decision 2005/618/EC, unless the substance is in an application that is exempt under EU RoHS. Unless otherwise stated by 3M in writing, this information represents 3M’s best knowledge and belief based upon information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M’s Regulatory Information Appendix, then 3M’s entire liability and Buyer’s exclusive remedy will be in accordance with the Warranty stated below.

Appendix E3: European Union RoHS

Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical & Electronic Equipment as amended by Commission Decision 2005/618/EC.

This product contains lead in the solder tail area in excess of the maximum concentration value allowed.

Unless otherwise stated by 3M in writing, this information represents 3M’s best knowledge and belief based upon information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M’s Regulatory Information Appendix, then 3M’s entire liability and Buyer’s exclusive remedy will be in accordance with the Warranty stated below.

Appendix E4: European Union RoHS

Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical & Electronic Equipment, as amended by EU Commission Decision 2005/618/EC, as amended by EU Commission Decision 2005/717/EC, as amended by EU Court of Justice Decision 2008/C 116/04

This product contains decaBDE in the insulating material in excess of the maximum concentration allowed for finished products subject to EU RoHS that are placed on the EU market after June 30, 2008.

Unless otherwise stated by 3M in writing, this information represents 3M’s best knowledge and belief based upon information provided by third party suppliers to 3M.

In the event any product is proven not to conform with 3M’s Regulatory Information Appendix, then 3M’s entire liability and Buyer’s exclusive remedy will be in accordance with the Warranty stated below.