

HITACHI CABLE MANCHESTER

Customer Specification

HCM - 20028/4

RFQ #: 41387

ITEM DESCRIPTION: .100 WIDE PITCH RIBBON CABLE, CONSISTING OF 4 CONDUCTORS, 26 AWG, UNSHIELDED, UNJACKETED. (UL) 2651, CSA I A/B

FLAT PRIMARY:

CONDUCTOR: 26 AWG 7/34 TIN OVERCOAT CU
.019" NOM OD

INSULATION: PVC LF

THE #1 CONDUCTOR IS MARKED WITH A BLUE POLARITY STRIPE.

AGENCY APPROVALS: U.L. STYLE 2651, 105C, 300V.
USE: FOR INTERNAL WIRING OF ELECTRONIC EQUIPMENT (SUCH AS COMPUTERS AND ELECTRIC BUSINESS MACHINES) VW-1 AWM.

CANADIAN STANDARDS ASSOCIATION AWM FT1.

TYPICAL ELECTRICAL CHARACTERISTICS:

S.E. IMPEDANCE: 150 ↓ (G-S-G @ 3.5 ns).

CAPACITANCE: 12.0 pF/ft. (G-S-G @ 1 KHz).

TIME DELAY: 1.35 ns/ft.


COND. RESISTANCE: 43.1 ↓/1000 ft. NOM. @ 20°C.

HITACHI CABLE MANCHESTER, INC. 900 Holt Avenue-East Industrial Park Manchester, N.H. 03109 (603) 669-4347	Drawn By: MGR Date: 09/02/99 Checked By: MGR Date: 09/02/99 Issued By: MGR Date: 09/02/99	REV# B
	THIS PRODUCT MADE IN THE U.S.A.	
ITEM: 20028-0004-XXX-XXX-802-S-00500-1228-00	PAGE 1 of 2 Approved By: Date:	


HITACHI CABLE MANCHESTER

Customer Specification

HCM - 20028/4

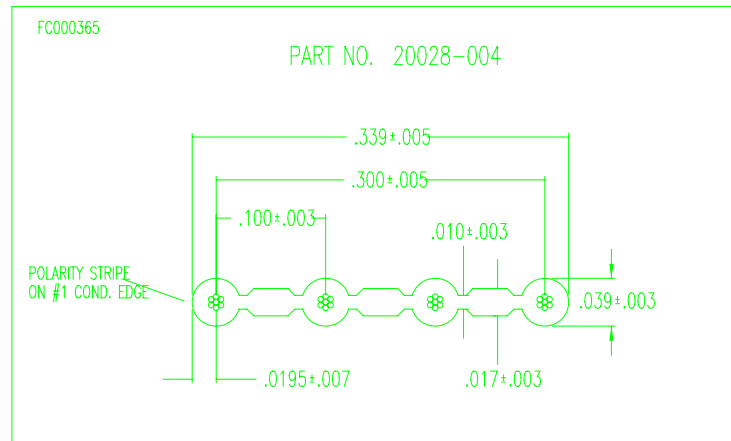

MARKING:

THE CABLE IS IDENTIFIED WITH THE FOLLOWING PRINT LEGEND:
HCM 20028  **AWM STYLE 2651 26 AWG 300V 105C VW-1 - LL50890**
CSA AWM I A/B 300V 105C FT1 - Z/YY (XXXX)
WHERE: Z = MONTH OF MFG.
YY = YEAR OF MFG.
XXXX = JOB NUMBER

Rev	Revision	Date	By	Appvd	PAGE 2 of 2
A	CHANGED HCM # AND CONDUCTOR	09/14/99	MG	MG	
B	UPDATE TO CSA PORTION OF THE PRINT LEGEND	09/27/10	DE	JME	