


REVISION RECORD			
REV	DESCRIPTION	DFTM	DATE
4		KP	6/9/98

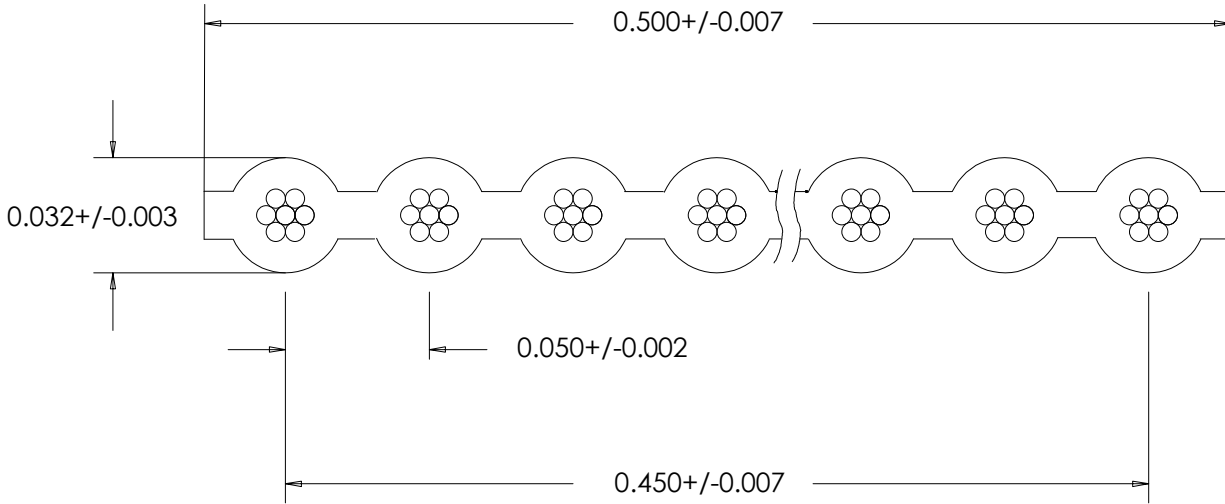

NOTES

Insulation: FEP, Green

Conductor: 26 AWG, 7/34, Silver Plated Copper

Impedance: 100 Ohms (Single End)
155 Ohms (Differential)

Capacitance: 11.5 pF/ft (Single End)
6.6 pF/ft (Differential)

Inductance: 0.13 uH/ft

Propagation Delay: 1.22 ns/ft

Temperature Rating: -55C to 200C

Voltage Rating: 300 V

U.L. Style: 20424

TOLERANCES	TEMP-FLEX CABLE, INC. 11 Depot Street South Grafton, MA 01560 Phone: 508-839-5987 Fax: 508-839-4128		CAGE CODE: 0CGL7
UNLESS OTHERWISE NOTED			PART No: F2607S-10-050-4
2 PL DEC +/-	DFTM: KP	DATE: 6/9/98	TITLE: 26 AWG, 10 Conductor, 0.050" Pitch Flat Cable
3 PL DEC +/-	APPD: FB	DATE: 6/9/98	
			SHEET 1 OF 1
			REV: 4