

HITACHI CABLE AMERICA

Customer Specification

HCM - 23043/14

RFQ #: 47416

ITEM DESCRIPTION: .050 PVC PLANAR RIBBON CABLE, CONSISTING OF 14 CONDUCTORS, 26 AWG, UNSHIELDED, UNJACKETED. (UL) 2651, CSA I A

FLAT PRIMARY:

CONDUCTOR: 26 AWG 7/34 TINNED COPPER
.019" NOM OD

INSULATION: PVC LF

BLACK

THE #1 CONDUCTOR IS MARKED WITH A RED POLARITY STRIPE.

AGENCY APPROVALS: U.L. RECOGNIZED AWM STYLE 2651, 105C, 300V.
USE: FOR INTERNAL WIRING OF ELECTRONIC EQUIPMENT (SUCH AS COMPUTERS AND ELECTRIC BUSINESS MACHINES) VW-1.

CANADIAN STANDARDS ASSOCIATION AWM FT1.


ENVIRONMENTAL COMPLIANCE*
ROHS (RECAST) EU DIRECTIVE 2011/65/EU
REACH - EU REGULATION 1907/2006
*ALLOWABLE LIMITS SUBJECT TO CHANGE - COMPLIANT ON DATE OF LATEST REVISION OF HITACHI SPECIFICATION

TYPICAL ELECTRICAL CHARACTERISTICS:

S.E. IMPEDANCE: 90 OHMS
CAPACITANCE: 23 pf/FT
TIME DELAY: 1.55 ns/FT NOM
COND. RESISTANCE: 42.5 OHMS/M' NOM @ 20°C

HITACHI CABLE AMERICA . 900 Holt Avenue-East Industrial Park Manchester, N.H. 03109 (603) 669-4347	Drawn By: JME Date: 06/03/13 Checked By: JME Date: 06/03/13 Issued By: JME Date: 06/03/13	REV#
	THIS PRODUCT MADE IN THE U.S.A.	
ITEM: 23043-0014-XXX-XXX-000-P-00500-9999-00	PAGE 1 of 2 Approved By: Date:	

HITACHI CABLE AMERICA
Customer Specification
HCM - 23043/14

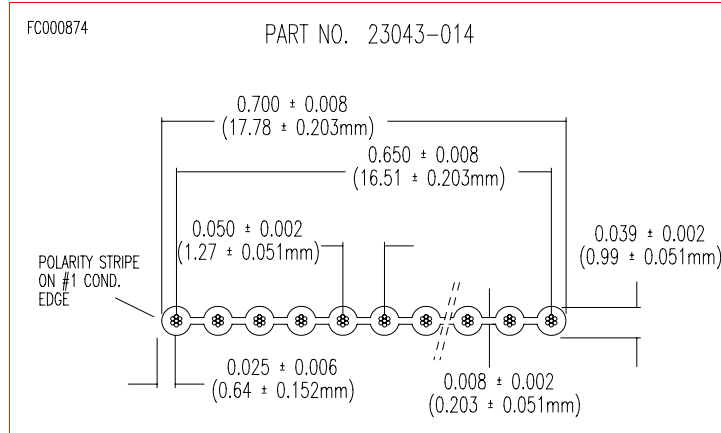

MARKING:

NO SURFACE PRINT REQUIRED FOR THIS CABLE