


REVISION RECORD			
REV	DESCRIPTION	DFTM	DCR
7		KP	

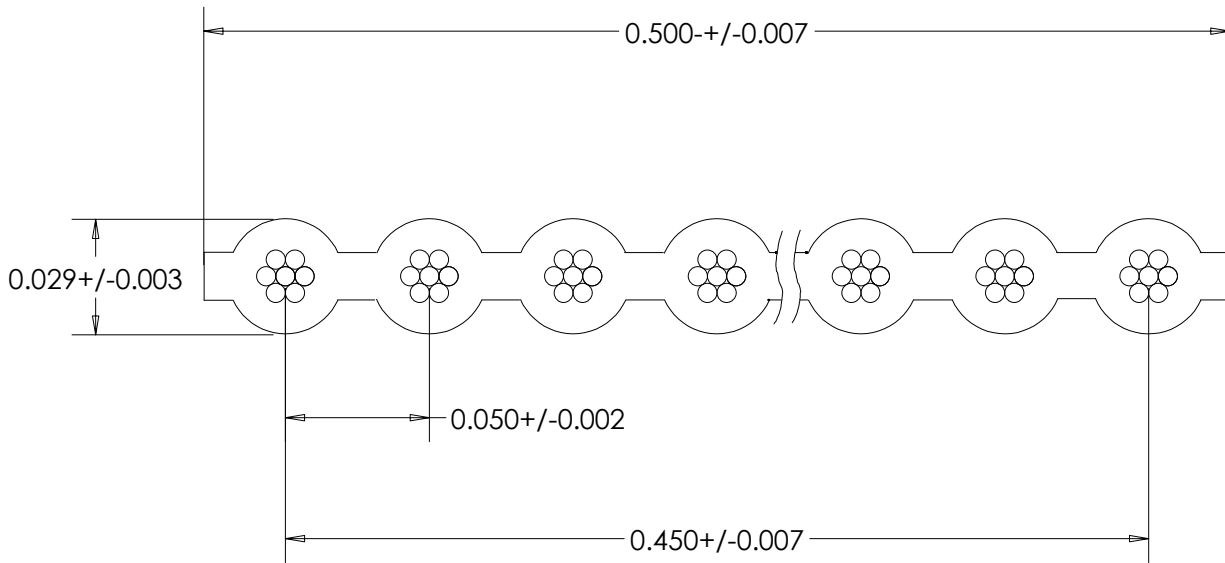

NOTES

Insulation: FEP, Red

Conductor: 28 AWG, 7/36, Silver Plated Copper

Impedance: 115 Ohms

Capacitance: 10.0 pF/ft

Propagation Delay: 1.25 ns/ft

Temperature Rating: -55C to 200C

Voltage Rating: 300 V

U.L. Style: 20424

<p>This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.</p>	<p><b>TEMP-FLEX CABLE, INC.</b></p> <p>26 Milford Road South Grafton, MA 01560 Phone: 508-839-5987 Fax: 508-839-4128</p>		CAGE CODE: 0CGL7	
	DFTM: KP	DATE: 3/13/07	<p>TITLE:</p> <p>28 AWG, 10 Conductor, 0.050" Pitch Flat Cable</p>	
	APPD: RP	DATE: 3/13/07		
			PART No:	
		<p><b>F2807S-10-050-1</b></p>		
		SHEET 1 OF 1		REV: 7