


# **INSULATION DISPLACEMENT CABLE**

## **1MM PITCH, 28 AWG, STRANDED** **EXTRUDED FEP**

### **MECHANICAL CHARACTERISTICS**

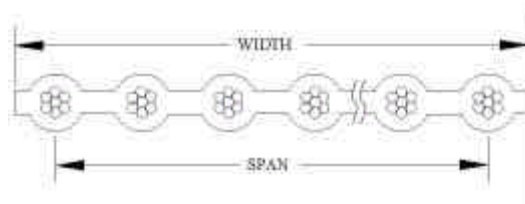

<b>Number of Conductors</b>	<b>Span</b>	<b>Width</b>
10	0.355 ± .006	0.394 ± .007
16	0.591 ± .006	0.630 ± .007
20	0.749 ± .006	0.788 ± .007
26	0.985 ± .006	1.024 ± .010
34	1.300 ± .008	1.340 ± .010
40	1.537 ± .008	1.576 ± .010
50	1.931 ± .008	1.970 ± .010
60	2.325 ± .010	2.364 ± .010
64	2.482 ± .010	2.522 ± .010
80	3.113 ± .012	3.152 ± .012

### **PHYSICAL CHARACTERISTICS**

<b>Conductor Type</b>	<b>28 AWG, 7/36 Stranded, Silver Plated Copper</b>
<b>Insulation</b>	<b>FEP Extruded (-55° C to 200° C)</b>
<b>Number of Conductors</b>	<b>10 to 80</b>
<b>Color</b>	<b>Solid Blue or Blue with Blue Polarity Stripe</b>

### **PACKAGING**

100 ft./Reel, 50 Ft. minimum average length, 10 Ft. minimum length

UL STYLE 20424