


TEMP-FLEX

a **molex** company

INSULATION DISPLACEMENT CABLE:
0.050" PITCH, 28 AWG, STRANDED EXTRUDED FEP

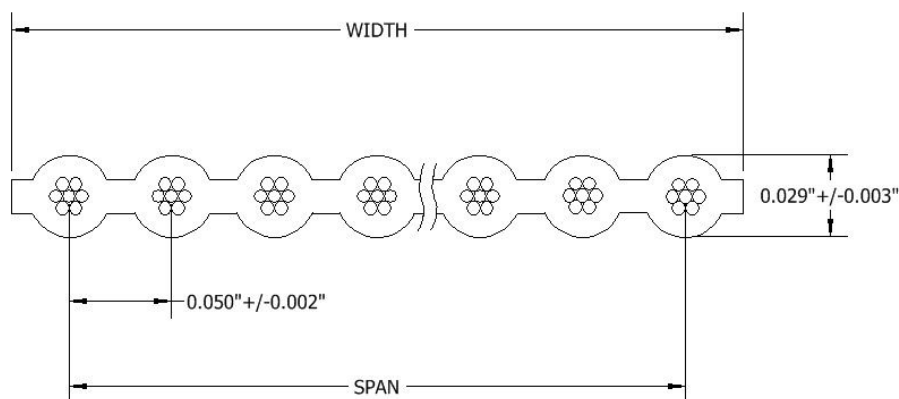

Cond. No.	Part Number	Span	Width
10	1000570142	0.450" ± 0.007"	0.500" ± 0.007"
14	1000570150	0.650" ± 0.007"	0.700" ± 0.007"
16	1000570157	0.750" ± 0.007"	0.800" ± 0.007"
20	1000570163	0.950" ± 0.010"	1.000" ± 0.010"
25	1000570425	1.200" ± 0.010"	1.250" ± 0.010"
26	1000570053	1.250" ± 0.010"	1.300" ± 0.010"
30	1000570181	1.450" ± 0.010"	1.500" ± 0.010"
34	1000570186	1.650" ± 0.010"	1.700" ± 0.010"
37	1000570189	1.800" ± 0.010"	1.850" ± 0.010"
40	1000570194	1.950" ± 0.010"	2.000" ± 0.010"
50	1000570204	2.450" ± 0.010"	2.500" ± 0.010"
60	1000570434	2.950" ± 0.015"	3.000" ± 0.015"
64	1000570433	3.150" ± 0.015"	3.200" ± 0.015"

CHARACTERISTICS	
Conductor	28 AWG, 7/36, Silver Plated Copper
Insulation	FEP
Color	Red
Impedance (ohms)	115 Unbalanced 165 Balanced
Capacitance (pF/ft)	10.5 Unbalanced 6.0 Balanced
Inductance (uH/ft)	0.14 Unbalanced 0.16 Balanced
Insulation Resistance (Mohm)	>500
Voltage Rating	300V
Temperature Rating	200C

STANDARD PACKAGING

100 ft./spool, 10 Ft. minimum length

MINIMUM ORDER QUANTITY:

500ft

UL STYLE 20424