


REVISION RECORD			
REV	DESCRIPTION	DFTM	DATE
3	Update to CAD File	KP	3/25/97
4	Added Notes	KP	6/9/98

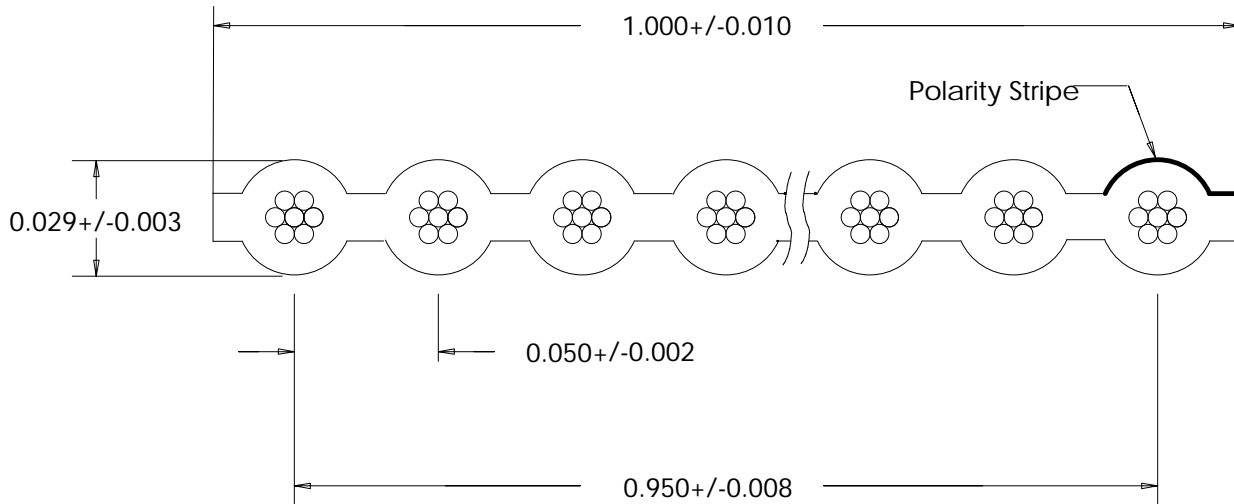

**NOTES**

- Insulation: FEP, Blue with Blue Stripe
- Conductor: 28 AWG, 7/36, Silver Plated Copper
- Impedance: 115 +/- 10 ohms
- Capacitance: 10.0 pF/ft
- Inductance: 0.14 uH/ft
- Propagation Delay: 1.21 ns/ft
- Temperature Rating: -55C to 200C
- Voltage Rating: 300 V
- U.L. Style: 20424

TOLERANCES	<b>TEMP-FLEX CABLE, INC.</b> 26 Milford Road South Grafton, MA 01560 Phone: 508-839-5987 Fax: 508-839-4128			CAGE CODE: 0CGL7	
				PART No: <b>F2807S-20-050-55</b>	
UNLESS OTHERWISE NOTED	DFTM: KP	DATE: 6/9/98	TITLE: 28 AWG, 20 Conductor, 0.050" Pitch Flat Cable	SHEET 1 OF 1	REV: 4
2 PL DEC +/- 3 PL DEC +/-	APPD: RP	DATE: 6/9/98			