


# INSULATION DISPLACEMENT CABLE

## .050" PITCH, 28 AWG, STRANDED EXTRUDED FEP

### MECHANICAL CHARACTERISTICS

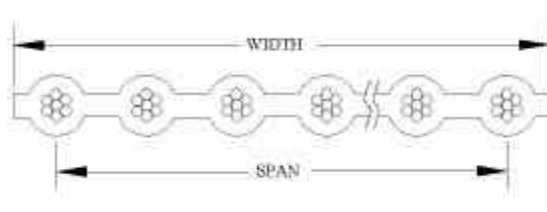

Number of Conductors	Span	Width
10	0.450 ± .007	0.500 ± .007
14	0.650 ± .007	0.700 ± .007
15	0.700 ± .007	0.750 ± .007
16	0.750 ± .007	0.800 ± .007
20	0.950 ± .010	1.000 ± .010
24	1.150 ± .010	1.200 ± .010
25	1.200 ± .010	1.250 ± .010
26	1.250 ± .010	1.300 ± .010
30	1.450 ± .010	1.500 ± .010
34	1.650 ± .010	1.700 ± .010
37	1.800 ± .010	1.850 ± .010
40	1.950 ± .010	2.000 ± .010
50	2.450 ± .010	2.500 ± .010
60	2.950 ± .015	3.000 ± .015
64	3.150 ± .015	3.200 ± .015

### PHYSICAL CHARACTERISTICS

Conductor Type	<b>28 AWG, 7/36 Stranded, Silver Plated Copper</b> Optional: <b>Solid Conductor</b> <b>Bare Copper</b>
Insulation	<b>FEP Extruded (-55° C to 200° C)</b>
Number of Conductors	<b>2 to 64</b>
Color	<b>Solid red or blue with blue polarity stripe (standard)</b> Optional: <b>Rainbow</b>

### PACKAGING

100 ft./Reel, 50 Ft. minimum average length, 10 Ft. minimum length  
UL STYLE 20424