


GeneralCable
FOUR CONDUCTOR #2/OAWG FESTOON CABLE
T-14267 (4/2/0)

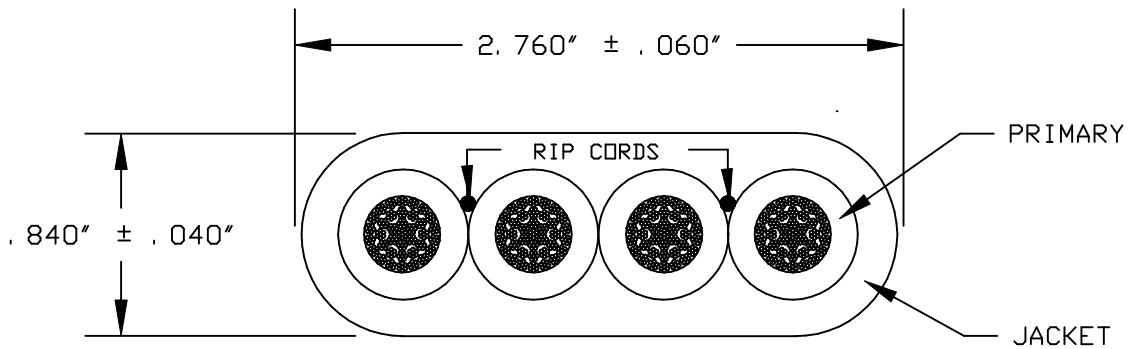

PRIMARY

CONDUCTOR: #2/OAWG 1330/30 ROPE (19X70) BARE COPPER
INSULATION: PVC- .080" NOMINAL WALL
DIAMETER: .642" NOMINAL

CABLE

FOUR (4) OF THE ABOVE PRIMARIES & RIP CORDS PULLED IN

JACKET

PVC- (BLACK)-.090" NOMINAL WALL

DIAMETER

.840" X 2.760" NOMINAL

REQUIREMENTS

TEMPERATURE/VOLTAGE RATING: 105°C 600V
NET CABLE WEIGHT: 2602 LBS/1000"
LISTINGS: UL/CSA TYPE FESTOON CABLE
AMPACITY: 205 AMPS @ 30°C AMBIENT TEMPERATURE

COLOR CODE

BLACK PRINTED 1 ONE
RED PRINTED 2 TWO
BLUE PRINTED 3 THREE
ORANGE PRINTED 4 FOUR

JACKET PRINT

"E-24573 PVC T-14267 (4/2/0) 105C 600V VW-1 (UL) - FESTOON
CABLE 4/C 2/OAWG - CSA LL9755 105C 600V SUN RES (-40C) FT1"
PLUS SEQUENTIAL FOOTAGE EVERY TWO FEET

REVISIONS

A	05/21/10	FIRST ISSUE

GeneralCable
1600 West Main Street, Willimantic, CT 06226-1128
The Power of One

DRAWING NO: 12-1840

REFERENCES

IEWC
GeneralCable P/N 278960.00.77 MODIFIED
T-14267 (4/2/0)

DRAWN BY: CAD	APPROVED BY: M. LAJEUNESSE
THIS DRAWING IS THE PROPERTY OF THE GeneralCable COMPANY AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF THE GeneralCable COMPANY	