


# ATTACHMENT SHEET

FILE NAME: PSR1636-05 C

Page 1 of 1


ECN# \_\_\_\_\_

FIG. 1.

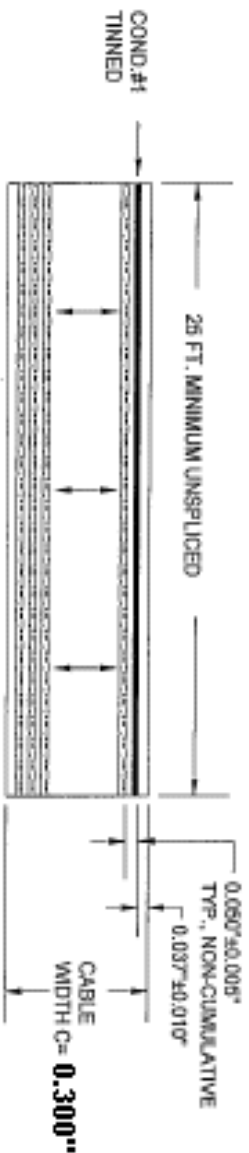

## PART NUMBERING SYSTEM

PSR1636-XX -

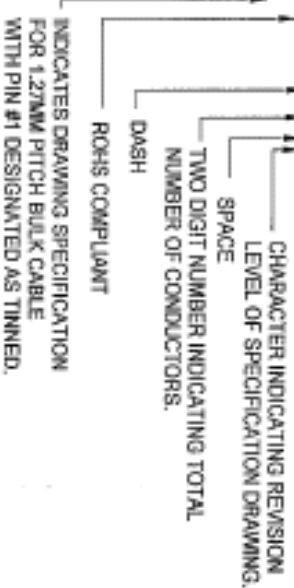

1a. PS-1636-05

(INDICATES 05 POS. CABLE, 1.27MM PITCH,  
COND. #1 TINNED)

- 1) BULK CABLE SPECIFICATION FOR 1.27MM PITCH  
FLAT LAMINATED CABLE.
- 2) NUMBER OF CONDUCTORS = 5
- 3) CONDUCTOR NUMBER 1 IS DISTINGUISHED FROM REMAINING  
CONDUCTORS BY TIN PLATING. IT IS VISIBLE, AS SUCH,  
THROUGH POLYESTER INSULATION.
- 4) INSULATION: 0.0002" THICK POLYESTER WITH FLAME RETARDANT  
ADHESIVE.
- 5) CONDUCTORS: 0.0003" X 0.028" FLAT COPPER, POS. #1 IS TIN PLATED  
(30 AWG EQUIVALENT)
- 6) U.L. RATING: AWG STYLE 2843, 105°C, VW-1, 300V
- 7) CURRENT RATING: 2.5A MAXIMUM
- 8) DIELECTRIC STRENGTH: 2500V/MIL.
- 9) WHEN ORDERING, USE PART NUMBERING SYSTEM DESCRIBED  
TO DETERMINE NUMBER OF CONDUCTORS REQUIRED
- 10) CABLE WIDTH= (NUMBER OF CONDUCTORS +1 ) X 0.050"