



DESC: 24/2 CABLE 80°C 30V

DWG NO: 2402C009

SCALE: 30x

DATE: 3/15/01

DR. BY: DP LANGER

NWI NO: FCAB242-039

CUSTOMER: INDUSTRIAL ELECTRIC


CUSTOMER P/N: 2402COSS-0NWG

ITEM SPECS.

- A. 24 GAUGE 7x.0076TC CONCENTRIC  
O.D. .023±.001"
- B. 6 MILS POLYPROPYLENE INSULATION 80°C 30V  
5 MILS MIN. POLYPROPYLENE INSULATION  
O.D. .038±.001"
- C. TECHNORA STRENGTH MEMBERS
- D. 90% MIN. SPIRAL SERVE SHIELD  
40 GAUGE SINGLE ENDS
- E. 15 MILS POLYURETHANE JACKET 80°C 30V  
12 MILS MIN. BLACK POLYURETHANE JACKET  
HALAGEN FREE POLYURETHANE  
CABLE IS NOT UL OR CSA APPROVED

**NORTHWIRE RESTRICTED**

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

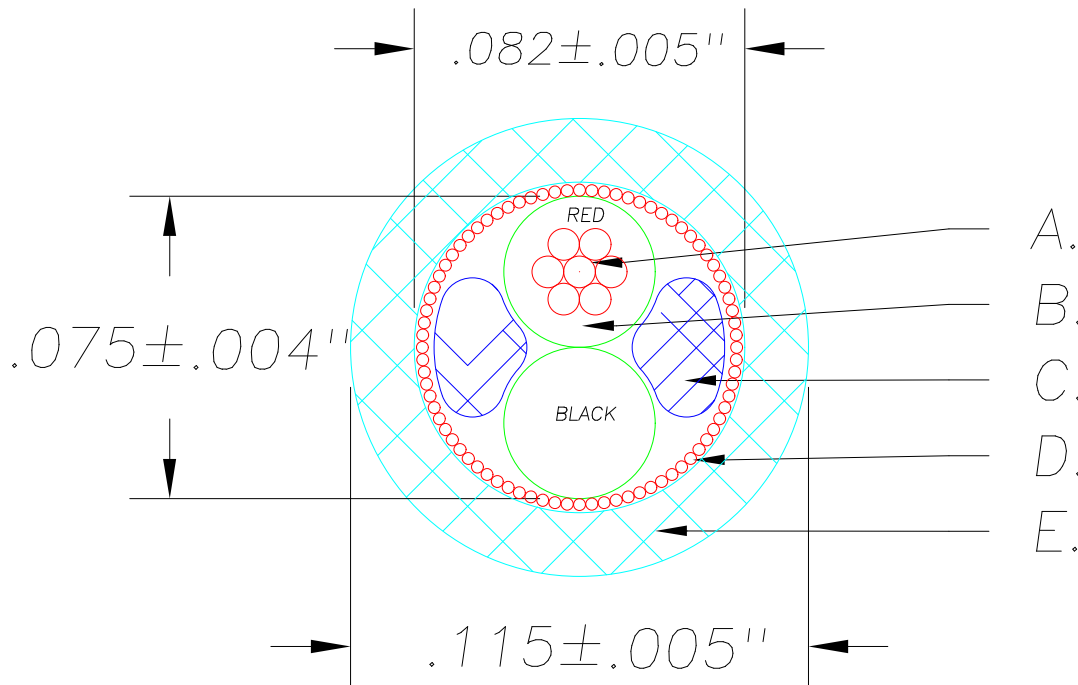

ELECTRICAL REQUIREMENTS:  
NONE SPECIFIED

MECHANICAL REQUIREMENTS:  
NONE SPECIFIED

WAS KEVLAR STRENGTH MEMBER; CHANGED CUSTOMER P/N	B	1/18/06	DPL	
RELEASED TO MFG	A	10/4/01	D.O	
ADDED NWI AND IEWC PART NUMBERS	2	4/17/01	DPL	
CHANGED FILLER, WAS COTTON	1	3/19/01	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL