
### **Build Your Own Custom Connector Panel Using Off-The-Shelf Components!**



Design and build your own custom connector panels using off-the-shelf materials! Our UCP Series modular custom panel system assembles quickly and easily using either a 2 or 4 space frame kit and your selections from an extensive collection of prepunched modules. UCP modular assemblies simply bolt together using supplied hardware. A single tier of five modules bolts across a 2 space frame kit, two tiers of five modules bolt across a 4 space frame kit.


Modules are prepunched to accept XLR, Neutrik, Elco, Canare and a host of other connector configurations (see accompanying diagrams). The inherent strength of the interlocking system eliminates panel deflection while inserting or removing connectors. When completed, all hardware is flush to create a professional appearance with no unsightly gaps. Visible parts have a black brushed and anodized finish. All modules are constructed of aluminum. Blank and vented panels are also available to fill unused spots.



### **Frame Kits**

Bolt modules to them in any combination.

Part #	Racking Height
FK2	3-1/2" (2 rackspace)
FK4	7" (4 rackspace)

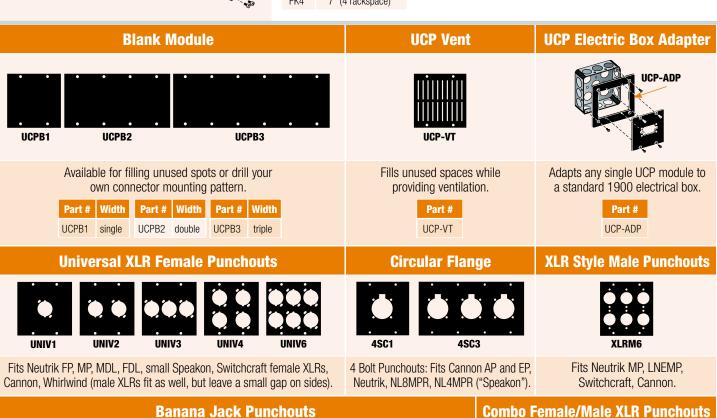

























Fits dual banana jack receptacles requiring up to 3/8" hole

Fits the universal dual banana iack receptacle requiring a 1/2" hole.

Fits mixed genders within a module.



### **UCP Fan**

Extend equipment life by removing heat from within an enclosure. Operates on 12VDC using integral 12" long pigtail leads, includes power supply.



Part # | Free Air dB Rating | Free Air CFM UCP-FAN 25 dBA

### **UCP FK2 Swinging Frame**

This hinged version of the FK2 frame kit allows rear access to modules. Captive 10-32 threaded thumbscrews hold the frame closed and require no tools to open. Kit includes a pair of threaded FK bars, hinged ear, captive thumbscrew ear, and all module mounting hardware. Occupies 2 rackspaces (3-1/2").

Part # UCP-SF



### **UCP Chassis**

The 2 space UCP chassis holds five modules in the front, and five modules in the rear. Shipped fully-assembled, each unit is comprised of four threaded FK bars, a pair of ears 9" deep, top and bottom, and all necessary module mounting hardware.

The top & bottom can be easily removed, leaving the frame intact.



### **UCP Cable Tray**

The UCP cable tray includes FK2 bars, mounting ears and bottom. 5" deep tray provides superior cable strain relief with a multitude of wire-tie slots. Occupies 2 rackspaces (3-1/2").

UCP-CT



UCP-CH



Fits the popular data multipin. 1DB9M fits HD15(SVGA) and additional 1/8" mini phone jack for easy laptop connection.


## Multipin Elco/Edac Punchouts



Fits 38, 56, 90 and 120 pin Elco/Edac connectors.

KEY-1

# **BNC Punchouts**



1/2BNC4, 3/8BNC4 Fits 1/2" and 3/8" diameter BNC shells, most insulated shells and fuses.

### 1/4", 3/8", 7/16" Punchouts



some switches

and LEDs.

3/8X1 1/4X2, 3/8X2 1/4" - fits RCA jacks.



3/8" - fits attenuators. "F" connectors, phone jacks, some switches.

3/8X5

Fits 3/8" insulated RCA connectors for component video & audio. 3/8X6

7/16" - fits Switchcraft #11, insulated phone jack, some switches.

### **Keystone Punchouts**



Accommodates a variety of connectors including RCA. RJ 11/12/45, F, BNC feed through, Banana, ST Fiber, etc. (keystone insert bezel not required for connector installation)

**RPS Series** 

JCP Series Options

**UCP-RPS** 

Remote power switch (see pg. 115 for info.)

### **BNC Recessed Canare Panel Punchouts**



Fits regular and feed-through types.

## **Multipin "G" Series**



Fits "G" Series connectors by AMP.

### **Twistlock Punchouts**





Fits most brands with oval mounting hole pattern (Hubbel Bryant, etc.) Use Part #TW2B for 2 bolt twistlocks and other 2 bolt devices. Use Part #TW3B for 3 bolt twistlocks.

# **Multipin Whirlwind**



Fits 39 and 61 pin.

# **Duplex Receptacle**





Removal of receptacle ears is necessary to fit between UCP bars.

# Socapex



19 pin.

**DL Series Multipins,** 



DL Series multipin.

1/2" Diameter "D" Punchouts



Fits 1/2" insulated BNC connectors for RGBHV.

