


DATE	REV	ECN	DESCRIPTION
7/13/2016	D		Updated OEM Designations

PRODUCT SPECIFICATION

Parent Number: FMC009-

Description: 0.35mm2 7/.25mm BC TW 3TAD ES-AU5T-1A348-AA Ford Global Spec FLR2X-A

DIAMETER: 0.051
TOLERANCE ±: 0.004

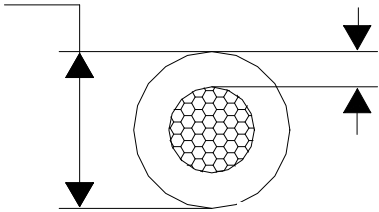

NOM WALL: 0.010
MINIMUM WALL: 0.008

Stranding: 7/.25mm BC LHL

Style: Ford: ES-AU5T-1A348-AA 3TAD; Chrysler: MS.90034 CABT; GM: GMW15626 CU-R3XLPE; ISO 6722 FLR2X-A

Insulation: XLPE

Print Legend: NO PRINT

Voltage: Nominal system voltage of 60 V rms or less in automotive electrical harnesses.

Temperature: -40C to +125C

Notes:

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

Southwire
Copperfield[®]
 1115 W. North Street
 Bremen, IN 46506
 Phone: 1-574-546-5115