


| DATE | REV | ECN | DESCRIPTION |
|-----------|-----|-----|---------------------------|
| 7/14/2016 | D | | Updated OEM designations. |

PRODUCT SPECIFICATION

Parent Number: FMC007-

Description: 0.35mm² 7/.25mm BC Thin Wall 2TAD ES-AU5T-1A348-AA Ford Global Spec FLYR-A Class 2

DIAMETER: 0.051
TOLERANCE ± : 0.004

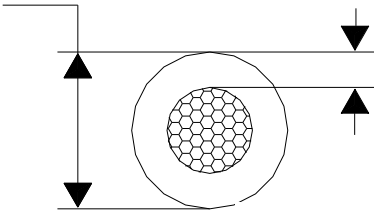

NOM WALL: 0.010
MINIMUM WALL: 0.008

Stranding: 7/.25mm BC LHL

Style: Ford: ES-AU5T-1A348-AA 2TAD; GM: GMW15626 CU-R2PVC; Chrysler: MS.90034 5ABT; FLYR-A

Insulation: PVC

Print Legend: NO PRINT

Voltage: Nominal system voltage of 60 V rms or less in automotive electrical harnesses.

Temperature: -40C to +105C

Notes:

This product complies with European Directive 2015/863 -- RoHS 3.

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____



Southwire®

Copperfield®

1115 W. North Street
 Bremen, IN 46506
 Phone: 1-574-546-5115

