


PRODUCT SPECIFICATION

<i>DATE</i>	<i>REV</i>	<i>ECN</i>	<i>DESCRIPTION</i>
7/9/2012	A	E21660	P/N ADDED

Parent Number: FMC012-

Description: 0.35mm² 7/.25mm BC UTW 2UAD ES-AU5T-1A348-AA Ford Global Spec FLUY-A

DIAMETER: 0.045
TOLERANCE ± : 0.002

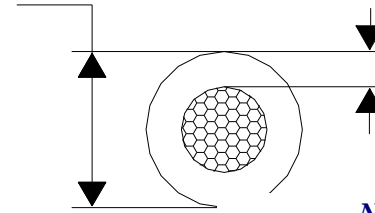

NOM WALL: 0.008

MINIMUM WALL: 0.006

Stranding: 7/.25mm BC LHL

Style: Ford: ES-AU5T-1A348-AA 2UAD; GM: GMW15626 FLUY-A;
ISO 6722; Din 72551

Insulation: PVC

Print Legend: NO PRINT

Voltage: Nominal system voltage of 60 V rms or less in automotive electrical harnesses.

Temperature: -40C to 105C

Notes:

This product complies with European Directive 2011/65/EU (RoHS 2)

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

COLEMAN CABLE, INC

1530 Shields Drive
Waukegan, IL 60085

Phone: 1-800-323-9355

www.colemancable.com

