

| DATE | REV | ECN | DESCRIPTION |
|-----------|-----|-----|--------------------------------|
| 11/1/2016 | D | | Updated style and temperature. |


PRODUCT SPECIFICATION

Parent Number: FMM007-

Description: 2.5mm2 37/.29mm BC Thin Wall 3TAD ES-AU5T-1A348-AA Ford Global Spec FLR2X-A ISO 6722-1

DIAMETER: 0.112

TOLERANCE ±: 0.006

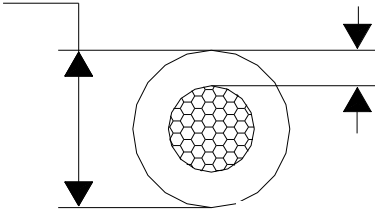

NOM WALL: 0.014

MINIMUM WALL: 0.011

Stranding: 37/.29mm BC LHL

Style: Ford: ES-AU5T-1A348-AA 3TAD; Fiat Chrysler: MS.90034 CABT; GM: GMW15626 CU-R3XLPE; ISO 6722-1; DIN 76722 FLR2X 2.5-A T125

Insulation: XLPE

Print Legend: NO PRINT

Voltage: Nominal system voltage of 60 V rms or less in automotive electrical harnesses.

Temperature: -40C to +125C

Notes:

This product complies with European Directive 2015/863 -- RoHS 3.

The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Southwire's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Southwire or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Southwire's standard terms and conditions contained therein, including without limitation Southwire's standard warranty. Southwire disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Southwire Company, LLC. Any information contained herein shall not be disclosed to any party without written consent of Southwire Company, LLC.

Customer Approval:

Customer Part Nbr(s): _____

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____



Copperfield®

1115 W. North Street
 Bremen, IN 46506
 Phone: 1-574-546-5115